

Main Features :-

1pc Reduced Bore

NPT Female ends

-25C to + 180C Temperature Range

PN63 rated

PTFE seats

Lever Operated



Ends to ANSI B2.1 NPT



GENEBRE
be water, be Genebre

TYPE: INDUSTRIAL VALVES

Dimensional Drawing:-

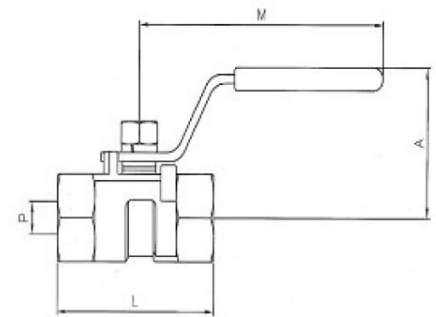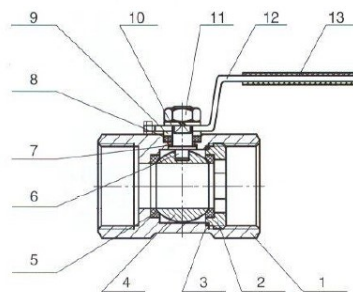

Nº	Denominación/Name	Material	Acabado Superficial/Surface Treatment
1	Cuerpo / Body	Acero Inox AISI 316 / SS 316	Granallado / Shot blasting
2	Tapa / Cap	Acero Inox AISI 316 / SS 316	Granallado / Shot blasting
3	Junta / Gasket	Teflón (PTFE)	-----
4	Bola / Ball	Acero Inox AISI 316 / SS 316	-----
5	Asiento / Ball Seat	Teflón (PTFE)	-----
6	Eje / Stem	Acero Inox AISI 316 / SS 316	-----
7	Anillo fricción / Friction ring	Teflón (PTFE)	-----
8	Anillo Prensa / Stem packing	Teflón (PTFE)	-----
9	Anillo Prensa / Stem ring	Acero Inox AISI 304 / SS 304	-----
10	Arandela / Washer	Acero Inox AISI 304 / SS 304	-----
11	Tuerca / Nut	Acero Inox AISI 304 / SS 304	-----
12	Maneta / Handle	Acero Inox AISI 304 / SS 304	-----
13	Funda / Handle Sleeve	Vynil	-----

Ref	Medida / Size	PN	Dimensiones / Dimensions (mm)				Peso / Weight (g)
			P	A	L	M	
2002 02	1/4"	63	4.6	32	39	60	65
2002 03	3/8"	63	6.8	36	44	80	102
2002 04	1/2"	63	9.2	42	56	87	165
2002 05	3/4"	63	12.5	45	59	87	262
2002 06	1"	63	15	50	69	105	415
2002 07	1 1/4"	63	20	54	77	105	750
2002 08	1 1/2"	63	25	70	81	125	820
2002 09	2"	63	32	78	97	140	1308

ISO 9001:2015 Accredited Company

Tel: +44(0)1386 552369

Fax: +44(0)1386 554227

sales@allvalves.co.uk

www.allvalves.co.uk

Allvalves Online Ltd, Automation House, Unit 2, Pershore, WR10 2DF UK