

# Actuation Centre - Actuated Valves Series 905P

## Stainless Steel 3pc Threaded Pneumatic Actuated



Main Features :-	
Full bore ball valve	Available with single acting
Stainless Steel CF8M	Double acting actuator
Option of V Ball for control app	Switchbox
RPTFE seats and Viton seals	Solenoid
BSP, NPT, Socket & Butt Weld	Electro pneumatic positioner
1/2" to 4"	Assembled and Tested
Option of ATEX and Sanitary	8 bar rated



TYPE: 905P PNEUMATIC

### Technical Specifications and Key Dimensions:


Specifications:	
Actuator housing:	Hard anodised aluminium
Actuator ATEX rating:	ATEX II 2GD EExd
Actuator Temp rating:	-20 +80C
Actuator pressure rating:	8 bar Max
Valve Approval:	None
Valve ends available:	ISO 7 BSP thread
Size range:	1/4" to 4"
Valve temp limits:	-25 to +180C
Valve pressure limits:	63 bar at ambient temperature

**Assembly Overview:-**

A cost effective pneumatically operated stainless ball valve available in double acting (air to open air to close) or single acting (failsafe, air to open spring to close). RPTFE seals make this valve suitable for a wide variety of applications. An all round good quality valve.

Don't forget your Switchboxes and / or Solenoid valve, positioner.



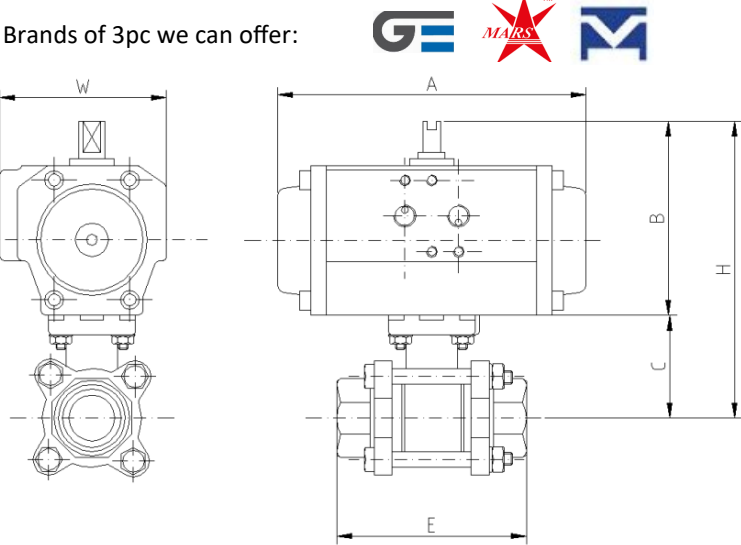

	Double Acting		Single Acting	
Size	E	H	E	H
1/4"	47.6	119.6	47.6	119.6
3/8"	47.6	119.6	47.6	119.6
1/2"	56	128	56	128
3/4"	73	145	73	161
1"	82	154	82	170
1 1/4"	91	179	91	191
1 1/2"	104	192	104	204
2"	120	208	120	228

**Did you know?**

We can offer the above assembly with a stainless mounting kit for temperature applications above 70+C. Note this typically adds 50-70mm to the overall height of the assembly - dimension H above.

\*\*Call for 21/2" to 4" dimensions