

# Actuation Centre - Actuated Valves Series 907P

## Stainless Steel 3way Flanged Pneumatic Actuated



Main Features :-	
Full bore ball valve	Available with single acting
Stainless Steel CF8M	Double acting actuator
Option of ATEX approved valve	Switchbox
RPTFE seats and Viton seals	Solenoid
BSP and flanged options	Electro pneumatic positioner
1" to 8"	Assembled and Tested
ANSI or PN16 versions	8 bar rated



TYPE: 907P PNEUMATIC


### Technical Specifications and Key Dimensions:

Specifications:	
Actuator housing:	Hard anodised aluminium
Actuator ATEX rating:	ATEX II 2GD EExd
Actuator Temp rating:	-20 +80C
Actuator pressure rating:	8 bar Max
Valve Approval:	None
Valve ends available:	Flanged PN16 (option of ANSI#150)
Size range:	1" to 8"
Valve temp limits:	-30 to +180C
Valve pressure limits:	16 bar at ambient temperature

**Assembly Overview:-**

A cost effective pneumatically operated stainless ball valve available in double acting (air to open air to close) or single acting (failsafe, air to open spring to close). L port or T port options for mixing/ diverting flow paths. Also available as screwed version.

Don't forget your Switchboxes and / or Solenoid valve, positioner.

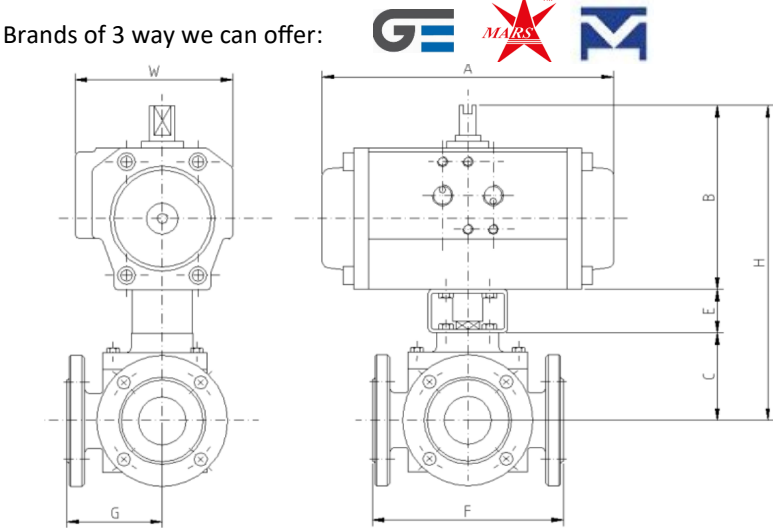

Size	Double Acting		Single Acting	
	F	H	F	H
1"	180	203	180	215
1 1/4"	190	213	190	248
1 1/2"	212	250	212	300
2"	230	285	230	320
2 1/2"	290	340	290	340
3"	310	355	310	371
4"	350	375	350	417

**Did you know?**

We can offer the above assembly with a stainless mounting kit for temperature applications above 70+C. Note this typically adds 50-70mm to the overall height of the assembly - dimension H above.