


Main Features :-

| | |
|-----------------------|----------------------------|
| Namur solenoid valve | China Origin |
| Manual override | 1/4" air ports |
| 5/2 for Double Acting | Available in 12/24VDC |
| 3/2 for Single Acting | Available in 24/110/220VAC |
| Safe area use | Anodized Aluminium body |
| LED Din Plug | NBR seals |
| Stocked in UK | 5-60+C rated |



Dimensional Drawing:-

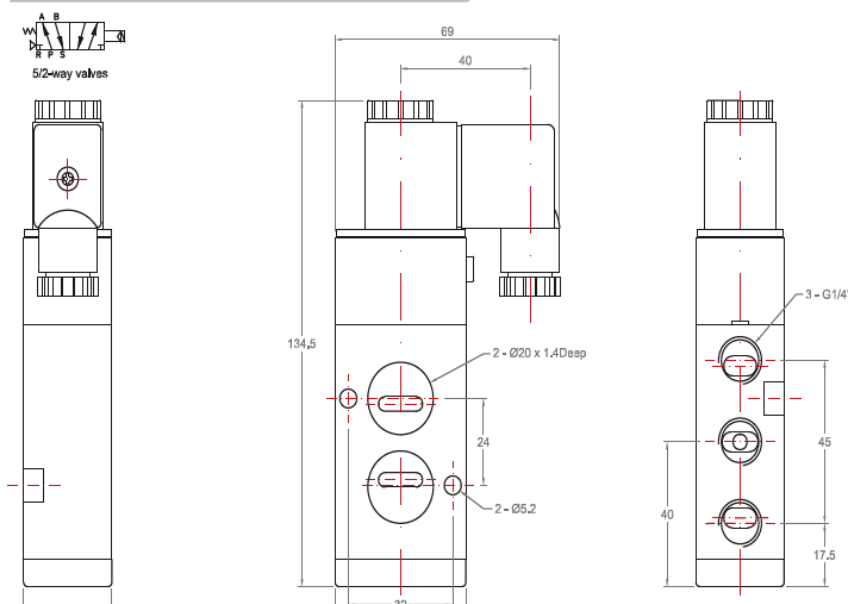

Additional Technical Specification:-

| Material | Body: Anodized aluminium | | | Seals: NBR | | |
|--------------------------|----------------------------------------------------------------------------|-------|-------|------------|--------|--------|
| Coil Voltage | DC12V | DC24V | AC24V | DC110V | AC110V | AC220V |
| Acting type | Internally pilot-actuated | | | | | |
| Position number | 5 - Position 2- Way or ⁽¹⁾ Conversion plate 3 - Position 2- Way | | | | | |
| Port size (G) | 1/4" | | | | | |
| Available connector | With Led | | | - | | |
| Fluid | Air | | | | | |
| Flow | 700 L/Min | | | | | |
| Lubrication | Lubricated or not | | | | | |
| Operating Pressure (Mpa) | 0.15 ~ 0.8 | | | | | |
| Temperature range | 5 ~ 60 °C | | | | | |
| Voltage range | ±10% | | | | | |
| Power consumption | AC: 4.5VA DC: 3W | | | | | |

ISO 9001:2015 Accredited Company

Tel: +44(0)1386 552369

Fax: +44(0)1386 554227

sales@allvalves.co.uk

www.allvalves.co.uk

Allvalves Online Ltd, Automation House, Unit 2, Pershore, WR10 2DF UK