

Main Features :-

- YTC Brand - Highest quality
- Aluminium housing
- Domed indicator
- Namur bracket included
- Available as Proximity sensors
- Available as ATEX switchbox
- Available in SS 316 housing



TYPE: ACCESSORIES


Dimensional Drawing:-

Model	Switching Type	Conduit	Bracket Type	Operating Temp
YT-850	<b>M</b> Mechanical Type (2 x SPDT)	<b>1</b> NPT1/2	<b>0</b> NONE	<b>1</b> -20°C ~ 80°C
	<b>P</b> Proximity Type	<b>3</b> PF1/2	<b>1</b> ST-1 (30°80,H20)	<b>2</b> -20°C ~ 120°C
		<b>4</b> M20	<b>2</b> ST-2 (30°80,H30)	
			<b>3</b> ST-3 (30°130,H30)	
			<b>4</b> ST-4 (30°130,H50)	



YT-850

Item - Type		YT-850M	YT-850P
Switch Type	Mechanical Switch(2xSPDT)		Inductive Proximity Sensor
		SS5GL (Omron)	SS10GL (Omron)
Switch Rating	AC	250V 3A 125V 5A	250V 10.1A 125V 10.1A
	DC	250V 0.2A, 125V 0.4A, 30V 4A, 14V 5A, 8V 5A	12~24VDC 8VDC
Ingress Protection		IP67	
Operating Temp		-20°C~80°C (Standard)	
Conduit Entry		NPT1/2( PF1/2,M20 )	
Terminal		8 Points	
Mounting Bracket		NAMUR VDI / VDE 3845, ISO 5211	
Material		Aluminum Diecasting	
Weight		880g (1 94b)	

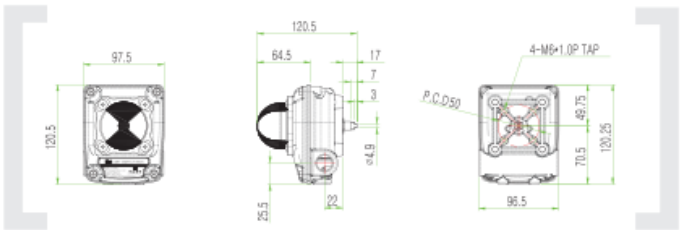

ISO 9001:2015 Accredited Company

Tel: +44(0)1386 552369

Fax: +44(0)1386 554227

sales@allvalves.co.uk

www.allvalves.co.uk

Allvalves Online Ltd, Automation House, Unit 2, Pershore, WR10 2DF UK