

Carbon Steel Ball Valve

Carbon Steel Flanged Ball Valve VINCO Brand



Main Features :-

Carbon Steel Flanged Ball Valve PN16

Full bore

Firesafe approved valve

3pc Design

Lever or Actuated

FPM (FKM)


1500 PSI



vinco

TYPE: CARBON STEEL

Additional Technical Specification:-

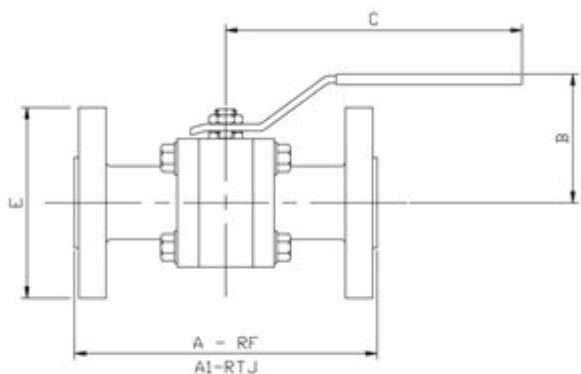

Connection	Flange
Full bore	Yes
Body construction	3-piece
DN	1/2" (15)
Pressure rating	1500 lbs
Operation/Actuation	Lever
Flange finish	RTJ Un machined
Fire-safe certified	Yes
Standard	Other
Actuator material	Steel
With drain	No
Body material	Steel
Material quality	ASTM A350 LF2
Material ball	Stainless steel
Material ball seal	Other
Quality class spindle	Stainless steel
Primary spindle seal material	FPM (FKM)
Sealing	Nylon

DN	ØP	A [mm]		B	C	Weight
["]		RF	RTJ			[Kgs]
15 (1/2)	12.1	215.9	215.9	81	200	7
20 (3/4)	15.2	228.6	228.6	88	200	9
25 (1)	20.3	254	254	99	230	12
40 (1 1/2)	31.8	304.8	304.8	129	350	23
50 (2)	38.1	368.3	371.3	137	350	34

Size	Temperature range	-29°C	+38°C	+100°C	+150°C	+200°C	+230°C	
2 1/2"-4"	-29°C/+230°C						o	[bar]
5"-8"	-29°C/+230°C						o	[bar]

ISO 9001:2015 Accredited Company

Tel: +44(0)1386 552369

Fax: +44(0)1386 554227

sales@allvalves.co.uk

www.allvalves.co.uk

Allvalves Online Ltd, Automation House, Unit 2, Pershore, WR10 2DF UK