



Main Features:-

- ◆ Y Strainer
- ◆ PN40 (80246—NPT Thread)
- ◆ Stainless Steel 1.4408 (CF8M)
- ◆ Working Temperature -30 to + 240C *
- ◆ Max. Working pressure 40 bar

*Temperature and pressure determined by valve body, seat etc.

Suitable Applications & Approvals:



HVAC



OIL



GAS



INDUSTRY






SERIES: 80245/80246

MANUFACTURER: **GENEBRE**


VALVE MATERIALS & DIMENSIONS

ITEM	SECTION	MATERIAL	ADDITIONAL INFO / OPTIONS
1	Body	SS 1.4408	Shot blasting
2	Mesh	AISI 316	Spare Part Code: 2991
3	Gasket	PTFE	Spare Part Code: 2991
4	Plug	SS 1.4408	Shot blasting

REF	SIZE	PN	A	L	Ød	e	Kg
80245-02	1/4"	40	30	65	1	1	0.29
80245-03	3/8"	40	30	65	1	1	0.21
80245-04	1/2"	40	40	65	1	1	0.22
80245-05	3/4"	40	45	80	1	1	0.35
80245-06	1"	40	55	90	1	1	0.66
80245-07	1 1/4"	40	65	105	1	1	0.77
80245-08	1 1/2"	40	70	120	1	1	1.15
80245-09	2"	40	85	140	1	1	1.76



Pressure temperature rating

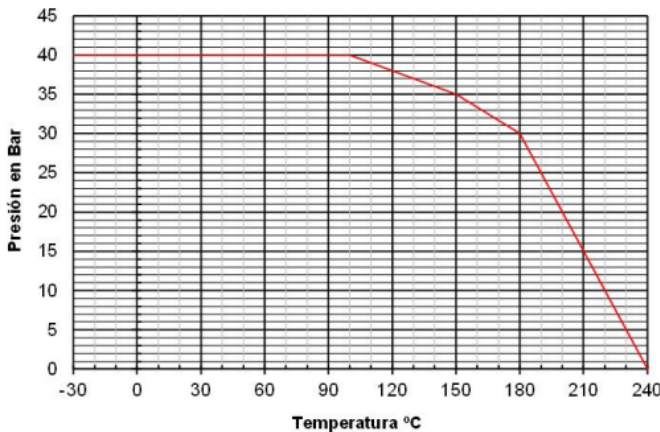

REF	SIZE	Kv
80245-02	1/4"	1.44
80245-03	3/8"	2.88
80245-04	1/2"	3.3
80245-05	3/4"	6.6
80245-06	1"	9.7
80245-07	1 1/4"	14.9
80245-08	1 1/2"	26.6
80245-09	2"	35.4



T +44 (0)1386 552369

E sales@allvalves.co.uk

W www.allvalves.co.uk

F +44 (0)1386 554227