



All Valves Online ductile iron gate valve, BSI V7 Gas approved.


Flanged PN16 with an epoxy coated ductile iron body, double seated NBR encapsulated wedge, double block and bleed, clockwise closing, approved and certified to GIS/V7-1:2007 and EN13774 Gas Approvals.

A high quality gas approved gate valve.



## Specifications:

- |   |                                    |
|---|------------------------------------|
| 1 | Body: EN GJS 500-7 Ductile Iron    |
| 2 | Bonnet Gasket: NBR                 |
| 3 | Cap Top: EN GJS 500-7 Ductile Iron |
| 4 | O Ring Seal: NBR                   |
| 5 | Guide Shoe: Plastic                |
| 6 | Flanges: PN16                      |

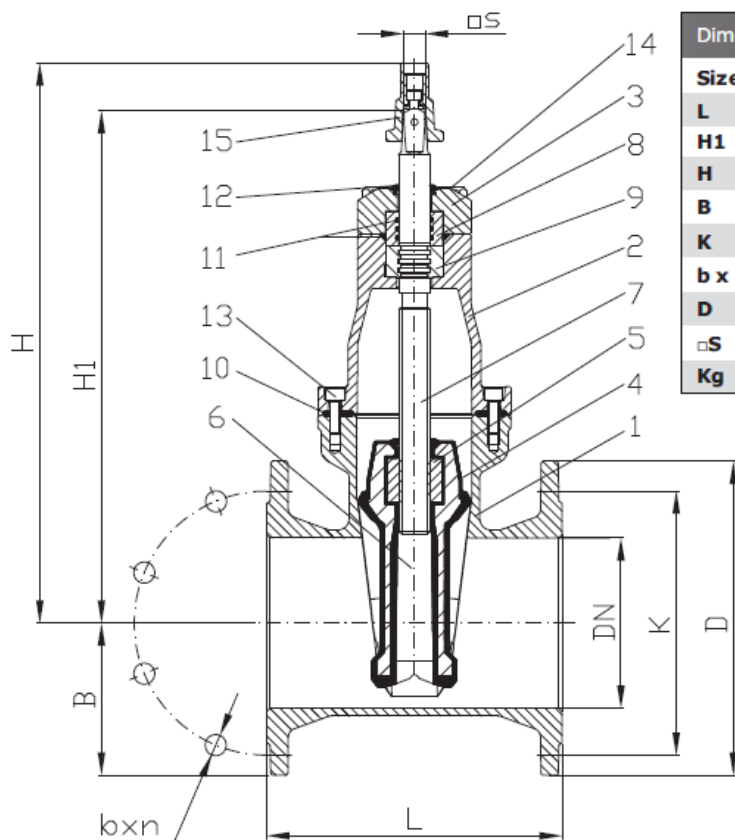

## Dimensions

| Size  | 2"     | 3"     | 4"     | 6"     | 8"      | 10"     | 12"     |
|-------|--------|--------|--------|--------|---------|---------|---------|
| L     | 178    | 203    | 229    | 267    | 292     | 330     | 356     |
| H1    | 330    | 315    | 349    | 454    | 556     | 646     | 727     |
| H     | 370    | 355    | 389    | 494    | 598     | 690     | 771     |
| B     | 75     | 95     | 102    | 134    | 165     | 196     | 225     |
| K     | 125    | 160    | 180    | 240    | 295     | 355     | 410     |
| b x n | 19 x 4 | 19 x 8 | 19 x 8 | 23 x 8 | 23 x 12 | 27 x 12 | 27 x 12 |
| D     | 165    | 200    | 220    | 285    | 340     | 405     | 460     |
| □S    | 19.3   | 19.3   | 19.3   | 19.3   | 24.3    | 27.3    | 27.3    |
| Kg    | 19.1   | 21.0   | 24.2   | 45.3   | 71.3    | 93.5    | 142.0   |

