



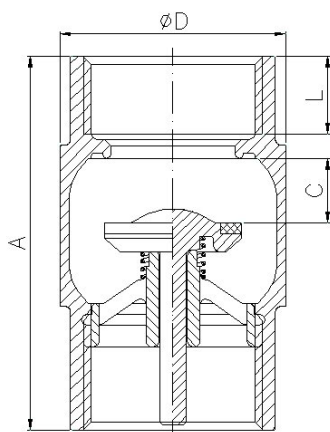

BRASS VALVES

GENEBRE PART: 3122N BRASS 'RE-GE+' PISTON CHECK VALVE, NPT

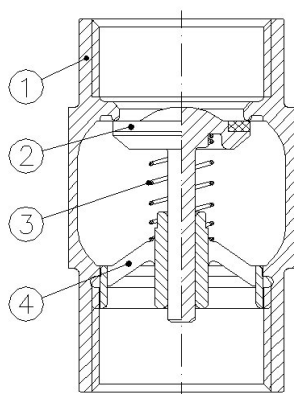

SPECIFICATIONS

1	Material Hot forged brass, chromed
2	Threaded ends according to ANSI B2.1
3	Min working pressure 0.04 Bar. (See below for max)
4	Max Temperature: Air -20°C to + 110°C
5	Max Temperature: Gas -20°C to + 60°C
6	Max Temperature: Water 0°C to + 90°C
7	Can be mounted in any orientation
8	Vulcanised NBR seal
9	Patented system
10	Improved internal geometry reduces turbulence and noise, and mono-block body eliminates leak risk compared to split body types

MATERIALS

1	Brass
2	Brass + vulcanised NBR
3	AISI 316
4	Brass

DIMENSIONS

AVOL REF	SIZE	PN Bar	A mm	DØ mm	Wt Kg
3122N 04	1/2"	25	55	27.5	0.11
3122N 05	3/4"	25	63	34.5	0.19
3122N 06	1"	25	70	42.0	0.29
3122N 07	1 1/4"	18	76	51.5	0.41
3122N 08	1 1/2"	18	83	62.5	0.59
3122N 09	2"	18	90	78.0	0.89
3122N 10	2 1/2"	12	118	100.0	1.91
3122N 11	3"	12	128	121.0	2.72
3122N 12	4"	12	144	150.0	4.49