




BRASS VALVES

GENEBRE PART: 3023 FULL BORE F x F BALL VALVE BSP, DIRECT MOUNT



SPECIFICATIONS

1	Material: Brass
2	Threaded ends according to ISO 228/1
3	Max working pressure 40 Bar at ambient temp
4	Max Temperature + 180°C
5	Full bore
6	ISO:5211 platform for direct mounting of valve actuator, stem DIN 3337
7	Hand lever available as optional extra (Part: GE3023L)


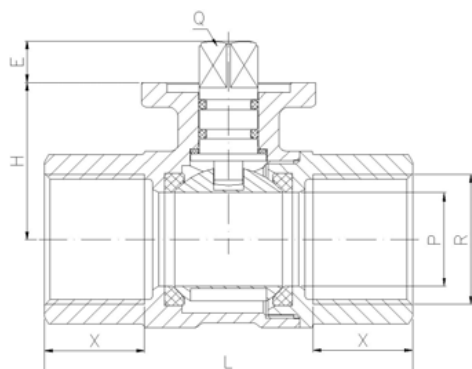


DIMENSIONS

AVOL REF	SIZE mm	L mm	H mm	ISO F x mm	Torque* Nm	Wt Kg
3023 04	1/2"	65	29.0	F03 x 9	3.5	0.23
3023 05	3/4"	75	32.0	F03 x 9	4.5	0.35
3023 06	1"	86	35.5	F04 x 9	7.0	0.53
3023 07	1 1/4"	100	43.3	F05 x 11	8.5	0.88
3023 08	1 1/2"	115	48.8	F05 x 11	11.5	1.26
3023 09	2"	132	59.3	F05/07 x 11	17.0	2.11

* TORQUE FACTORS

APPLICATION	MULTIPLY
Lubricating oils or fluids	0.8
Dry gasses, natural gasses, compresses air	1.5
Liquids with abrasive particles (fit filter !)	2.5
Valve remains static for 1 day	1.3
Valve remains static for 1 week	1.6
Valve remains static for 1 month	2.0

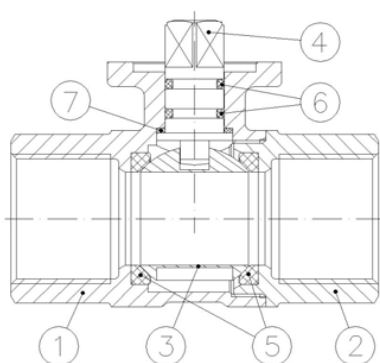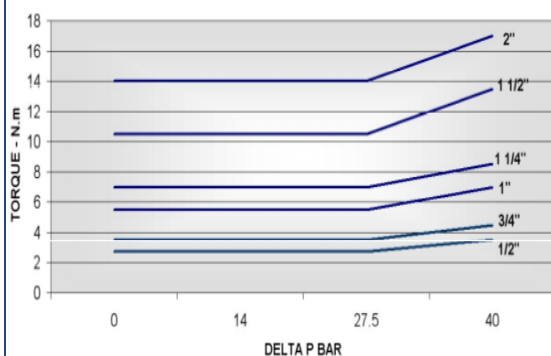

MATERIALS

1	Chrome plated brass
2	Chrome plated brass
3	Chrome plated brass
4	Chrome plated brass
5	PTFE
6	Viton
7	PTFE