




BRASS VALVES

GENEBRE PART: 3080 REDUCED BORE 3 WAY T PORT BALL VALVE BSP



SPECIFICATIONS



1	Material: Brass
2	Threaded ends according to ISO228/1
3	Max working pressure 25 Bar at ambient temp
4	Temperature -10°C to +120°C
5	Reduced bore
6	Conforms to ECX Directive 97/23/EC
7	Hand operated with aluminium lever

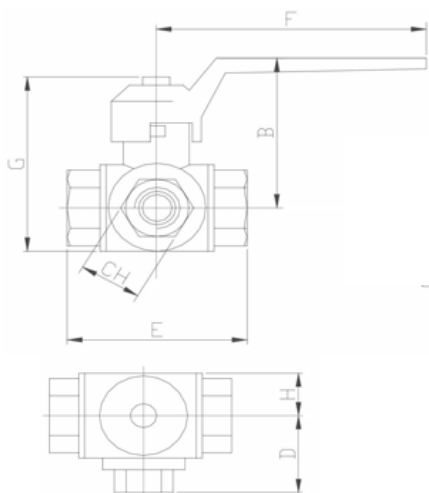


DIMENSIONS

AVOL	SIZE	B	D	F	H	Wt
REF	mm	mm	mm	mm	mm	Kg
3080 02	1/4"	65	38.5	125	22	0.71
3080 03	3/8"	65	38.5	125	22	0.67
3080 04	1/2"	65	38.5	125	22	0.64
3080 05	3/4"	83	46.0	145	25	1.10
3080 06	1"	96	52.0	170	30	1.65
3080 07	1 1/4"	102	59.0	170	34	2.25
3080 08	1 1/2"	109	69.0	170	40	3.64
3080 09	2"	139	81.0	260	48	5.70


FLOW PATH OPTIONS




Flow is in the three directions (A-B-C)



Flow is only from B to C (or from C to B)



Flow is only from A to C (or from C to A)



Flow is only from A to B (or from B to A)