




CARBON STEEL VALVES

GENEBRE PART: 2526A 2 PCE FULL BORE BALL VALVE FLANGED ASA150 DIRECT MOUNT

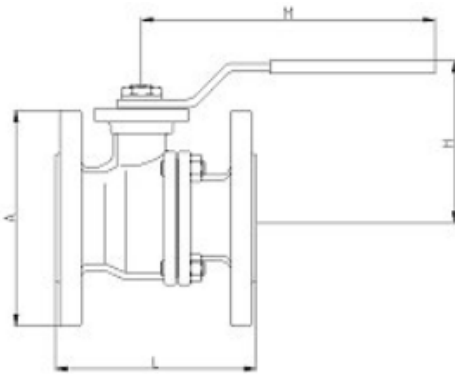

SPECIFICATIONS

1	Material Carbon Steel ASTM A216 WCB
2	Flanged ends according to ANSI B 16.5 Class 150
3	Max working pressure 19 BAR (See PxT chart below)
4	Max Temperature -30°C to +180°C
5	Full bore, fire safe design, anti-static
6	Direct mount ISO5211 patent 9900474 respected
7	R PTFE seats & CF PTFE / SS PTFE seals


DIMENSIONS

AVOL REF	SIZE	L	H	M	Wt
	mm	mm	mm	mm	Kg
2526A 04	1/2"	108	90	165	1.53
2526A 05	3/4"	117	95	165	1.94
2526A 06	1"	127	95	165	2.67
2526A 07	1 1/4"	140	106	165	3.98
2526A 08	1 1/2"	165	110	200	5.47
2526A 09	2"	178	118	200	8.10
2526A 10	2 1/2"	190	160	400	15.10
2526A 11	3"	203	170	400	19.00
2526A 12	4"	229	186	400	30.59

TORQUE FIGURES *excluding safety

SIZE	ISO:5211	STEM SQ mm	TORQUE Nm*
1/2"	F004	9	5
3/4"	F04/05	9	8
1"	F04/05	11	10
1 1/4"	F05/07	14	14
1 1/2"	F05/07	14	20
2"	F05/07	14	30
2 1/2"	F07/10	17	36
3"	F07/10	17	60
4"	F07/10	17	95

PRESSURE/ TEMPERATURE CHART

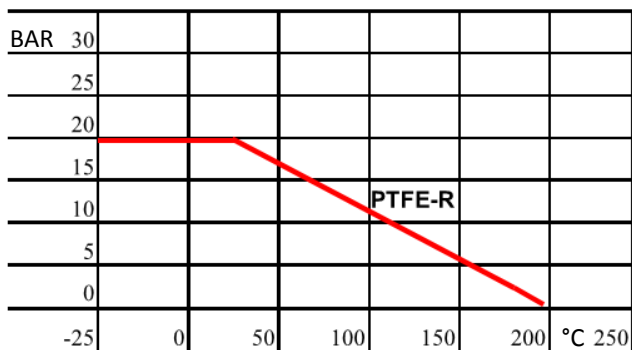

Design	ANSI B 16.34
Face to face	ANSI B 16.10
Inspection & Testing	API 598, API 6D
Flanged ends	ANSI B 16.5