




CARBON STEEL VALVES

GENEBRE PART: 2035 1PCE REDUCED BORE WELD ENDED BALL VALVE



SPECIFICATIONS


1	Material Carbon steel to DIN 37
2	Extended ends according to EN 12627
3	Max working pressure 25/40 BAR (See PxT chart below)
4	Max Temperature -25°C to + 180°C
5	Reduced bore
6	Bi-directional flow
7	Graphited PTFE seats & PTFE seals
8	Maintenance free

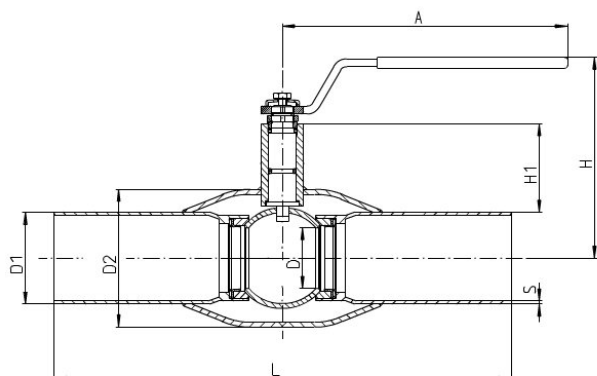

DIMENSIONS

AVOL REF	SIZE mm	PN BAR	A mm	L mm	H mm	Wt Kg
2035 04	1/2"	40	120	230	100	0.8
2035 05	3/4"	40	120	230	100	1.0
2035 06	1"	40	150	230	105	1.3
2035 07	1 1/4"	40	150	260	105	1.6
2035 08	1 1/2"	40	190	260	125	2.2
2035 09	2"	40	190	300	130	3.0
2035 10	2 1/2"	25	280	300	180	4.8
2035 11	3"	25	280	300	190	6.7
2035 12	4"	25	280	325	220	9.9
2035 13	5"	25	420	325	245	14.5
2035 14	6"	25	550	350	265	23.5
2035 16	8"	25	Gear	400	Gear	56.0
2035 18	10"	25	Gear	530	Gear	100.0
2035 20	12"	25	Gear	530	Gear	152.0

PRESSURE/ TEMPERATURE CHART

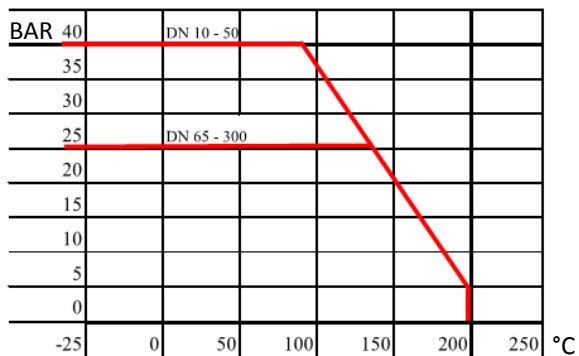

SIZES 8" - 12" HAVE GEAR OPERATOR

