




CARBON STEEL VALVES

GENEBRE PART: 2034 3 PCE FULL BORE F x F BALL VALVE BSP



SPECIFICATIONS

1	Material ASTM A216 WCB Carbon steel
2	Threaded ends according to DIN 2999
3	Max working pressure 63 BAR (See PxT chart below)
4	Max Temperature -25°C to + 180°C
5	Full bore
6	Bi-directional flow
7	R PTFE seats & PTFE seals

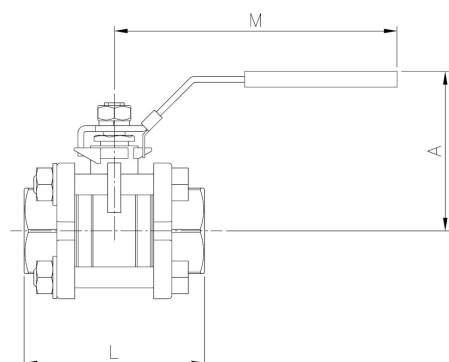

DIMENSIONS

AVOL REF	SIZE mm	A mm	L mm	M mm	Wt Kg
2034 02	1/4"	48	50	10	0.28
2034 03	3/8"	48	50	100	0.26
2034 04	1/2"	50	61	103	0.63
2034 05	3/4"	60	70	127	0.60
2034 06	1"	64	80	127	0.81
2034 07	1 1/4"	79	93	154	1.43
2034 08	1 1/2"	85	102	154	1.74
2034 09	2"	87	124	192	3.11
2034 10	2 1/2"	117	156	244	6.16
2034 11	3"	125	179	244	9.08
2034 12	4"	173	218	330	19.41

* Torque is without safety.

PRESSURE/ TEMPERATURE CHART

