




CARBON STEEL VALVES

GENEBRE PART: 2034N 3 PCE FULL BORE F x F BALL VALVE NPT



SPECIFICATIONS

1	Material ASTM A216 WCB Carbon steel
2	Threaded ends according to ANSI B2.1 NPT
3	Max working pressure 63 BAR (See PxT chart below)
4	Max Temperature -25°C to +180°C
5	Full bore
6	Bi-directional flow
7	R PTFE seats & PTFE seals

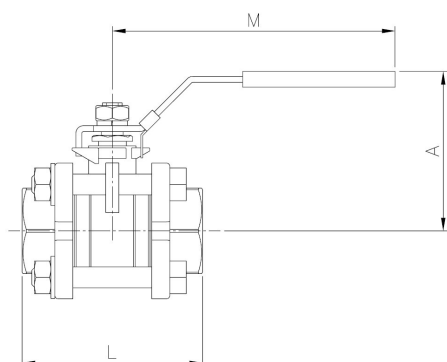

DIMENSIONS

AVOL REF	SIZE mm	A mm	L mm	M mm	Wt Kg
2034N 02	1/4"	48	50	10	0.28
2034N 03	3/8"	48	50	100	0.27
2034N 04	1/2"	50	61	103	0.43
2034N 05	3/4"	60	70	127	0.61
2034N 06	1"	64	80	127	0.83
2034N 07	1 1/4"	79	93	154	1.46
2034N 08	1 1/2"	85	102	154	1.77
2034N 09	2"	87	124	192	3.16
2034N 10	2 1/2"	117	156	244	6.44
2034N 11	3"	125	179	244	9.74
2034N 12	4"	173	218	330	20.49

* Torque is without safety.

PRESSURE/ TEMPERATURE CHART

