



CARBON STEEL VALVES

GENEBRE PART: 2034S 3 PCE FULL BORE SOCKET WELD BALL VALVE




SPECIFICATIONS

1	Material ASTM A216 WCB Carbon steel
2	Ends according to ANSI B16.11
3	Max working pressure 63 BAR (See PxT chart below)
4	Max Temperature -25°C to + 180°C
5	Full bore
6	Bi-directional flow
7	R PTFE seats & PTFE seals

DIMENSIONS

AVOL REF	SIZE mm	A mm	L mm	M mm	Wt Kg
2034S 02	1/4"	48	50	10	0.29
2034S 03	3/8"	48	50	100	0.29
2034S 04	1/2"	50	61	103	0.39
2034S 05	3/4"	60	70	127	0.61
2034S 06	1"	64	80	127	0.86
2034S 07	1 1/4"	79	93	154	1.37
2034S 08	1 1/2"	85	102	154	2.04
2034S 09	2"	87	124	192	3.74
2034S 10	2 1/2"	117	156	244	6.44
2034S 11	3"	125	179	244	10.20
2034S 12	4"	173	218	330	20.49

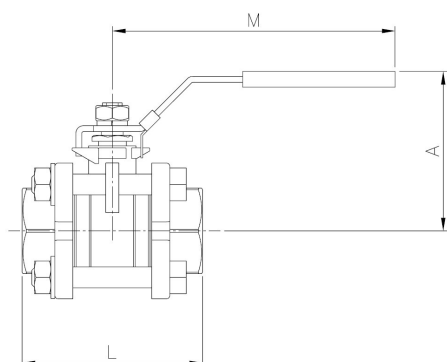

PRESSURE/ TEMPERATURE CHART

