





CARBON STEEL VALVES

GENEBRE PART: 2231 CARBON STEEL BELLOWS GLOBE VALVE FLANGED PN16



SPECIFICATIONS

1	Material ASTM A216 WCB
2	Ends flanged PN16
3	Max working pressure 16 Bar
4	Working temperature -20 to +350°C
5	Bellows sealed design totally eliminating stem leakage
6	Maintenance free
7	Non-rising stem with position indicator

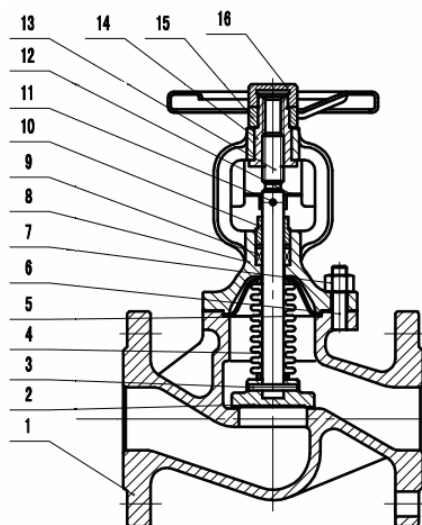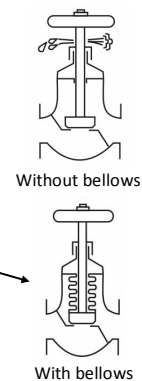

MATERIALS

1	ASTN A216 WCB + Synthetic paint
2	2Cr13
3	SS 304
4	SS 304
5	SS 304 + Graphite
6	ASTM A193-B7
7	ASTM A194-2H
8	ASTN A216 WCB + Synthetic paint
9	Graphite
10	2Cr13
11	SS 304
12	Carbon steel
13	2Cr13
14	Bras
15	Carbon steel
16	Carbon steel


Kv Values

DN 15	DN 20	DN 25	DN 32	DN 40	DN 50	DN 65	DN 80	DN 100	DN 125	DN 150	DN 200
4.2	6.9	11.5	18	28	45	78	121	185	280	400	730



CARBON STEEL VALVES

GENEBRE PART: 2231 CARBON STEEL BELLOWSGLOBE VALVE FLANGED PN16

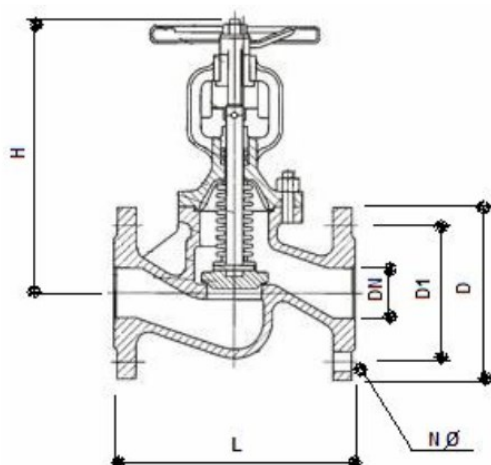

DIMENSIONS				
AVOL REF	SIZE	H mm	L mm	Wt Kg
2231 04	1/2"	195	130	4.3
2231 05	3/4"	200	150	5.3
2231 06	1"	220	160	6.3
2231 07	1 1/4"	225	180	8.0
2231 08	1 1/2"	235	200	9.8
2231 09	2"	250	230	13.5
2231 10	2 1/2"	260	290	19.1
2231 11	3"	265	310	24.0
2231 12	4"	370	350	37.0
2231 13	5"	400	400	62.0
2231 14	6"	515	480	80.0
2231 15	8"	550	600	136.0

PRESSURE x TEMPERATURE CHART

