




CARBON STEEL VALVES

GENEBRE PART: 2222 CARBON STEEL NEEDLE VALVE, NPT




SPECIFICATIONS

1	Material ASTM A105
2	Ends threaded ANSI B 2.1 NPT
3	Max working pressure 3000psi
4	Working pressure/ temperature 1/4" - 1/2" = 220 Bar at ambient, max +260°C (lower pressure) 3/4" - 1" = 220 Bar at ambient, max +240°C (lower pressure)
5	PTFE & Graphoil stem packing

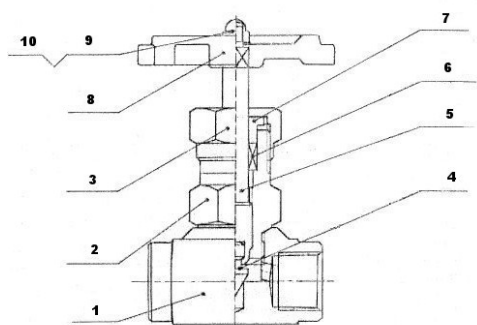

MATERIALS

1	ASTM A105
2	ASTM A105
3	ASTM A105
4	ASTM A182 F6
5	ASTM A182 F6
6	PTFE & Graphite
7	ASTM A105
8	Aluminium
9	Carbon Steel
10	Carbon Steel

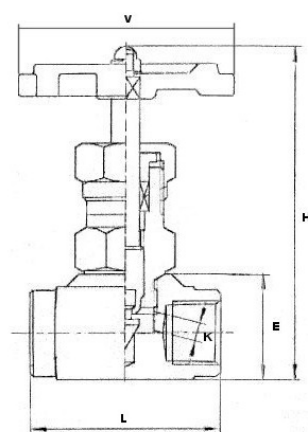

DIMENSIONS

AVOL REF	SIZE	H mm	L mm	K mm	Wt Kg
2222 02	1/4"	85	50	3	0.26
2222 03	3/8"	110	55	4	0.36
2222 04	1/2"	115	60	6	0.53
2222 05	3/4"	120	70	8	0.76
2222 06	1"	138	75	9	1.18