





GENEBRE PART: 2933 CLAMP END ISO5211 SANITARY BALL VALVE

SPECIFICATIONS	
1	Reduced bore ball valve (cavity filled seats)
2	Body AISI 316 , internally polished Ra 0.8µm
3	Clamp ends according to BS4825-3 (inches)
4	Mechanically externally polished
5	PTFE Seats and seals (+NBR stem O ring)
6	Pressure: Max 25 Bar (see chart opposite)
7	Temperature : -25°C to + 100°C
8	Anti-static device
9	Lockable lever
10	ISO5211 Mounting pad allowing the direct mounting of valve actuators.

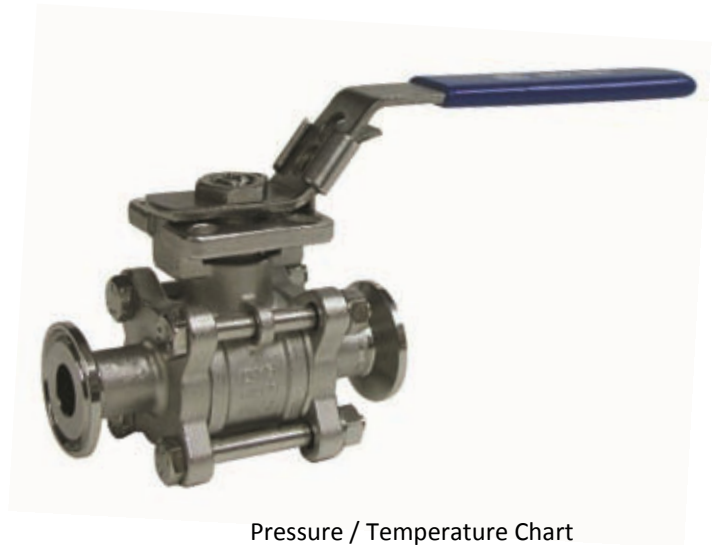

Pressure / Temperature Chart

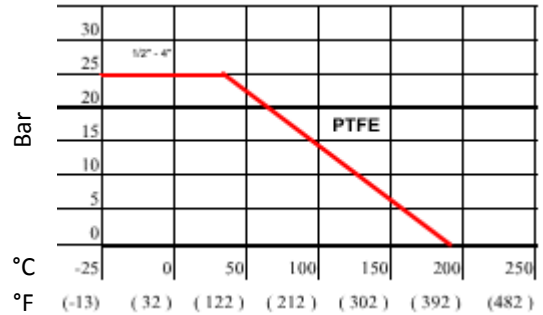

DIMENSIONS									
REF	SIZE mm	D mm	B mm	L mm	H mm	H1 mm	h mm	W mm	ISO5211
2933 04	1/2"	9.4	25.4	90	42.0	72	9	145	F03/F04
2933 05	3/4"	15.6	25.4	90	48.5	77	9	145	F03/F04
2933 06	1"	25.0	50.5	100	58.5	88	11	175	F04/F05
2933 08	1 1/2"	35.6	50.5	125	70.3	106	14	190	F05/F07
2933 09	2"	48.6	64.0	150	77.7	123	14	190	F05/F07
2933 10	2 1/2"	60.3	77.5	190	100	150	17	260	F07/F10
2933 11	3"	72.9	91.0	220	108	159	17	260	F07/F10
2933 12	4"	97.6	119	270	140	198	22	400	F10

