




EXPANSION JOINTS

GENEBRE PART: 2833 DOUBLE WAVE RUBBER EXPANSION JOINT, FLANGED PN10




SPECIFICATIONS

1	Helps reduce noise and absorbs vibration
2	Working temp range -10°C to $+105^{\circ}\text{C}$
3	Pressure 400mmHg vacuum to 10 Bar
4	Allows axial and lateral movement
5	EPDM body, galvanised steel ends

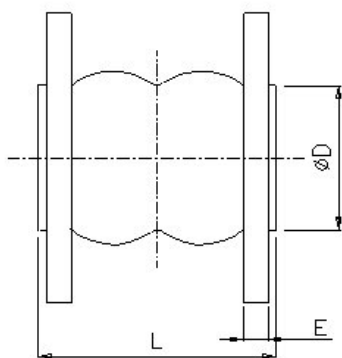

DIMENSIONS

AVOL REF	SIZE	L mm	D mm	Wt Kg
2833 09	2"	175	86	4.65
2833 10	2 1/2"	175	106	6.15
2833 11	3"	175	116	6.60
2833 12	4"	225	150	7.05
2833 13	5"	225	180	9.70
2833 14	6"	225	209	13.40
2833 16	8"	325	260	18.90
2833 18	10"	325	320	23.15
2833 20	12"	325	367	30.05

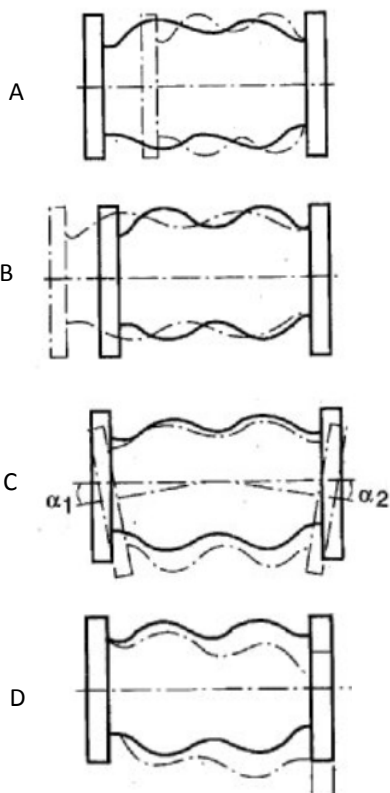

	Axial Compression	Axial Elongation	Angular Deflection	Lateral Displacement
	A mm	B mm	C $\alpha 1 + \alpha 2$	D mm
2831 09	50	25	35°	45
2831 10	50	25	35°	45
2831 11	50	35	35°	45
2831 12	50	35	35°	38
2831 13	50	35	30°	38
2831 14	50	35	30°	38
2831 16	60	35	30°	30
2831 18	60	35	30°	30
2831 20	60	35	20°	30