




EXPANSION JOINTS

GENEBRE PART: 2856 NPT BALL FLOAT VALVE, 316 SS



SPECIFICATIONS

1	Floating valve
2	Made of stainless steel 316
3	Polytene Floating
4	Connexion Gas Threaded
5	Full Bore
6	Max Working Pressure 10Kg / cm2
7	Max Working Temperature +30°C

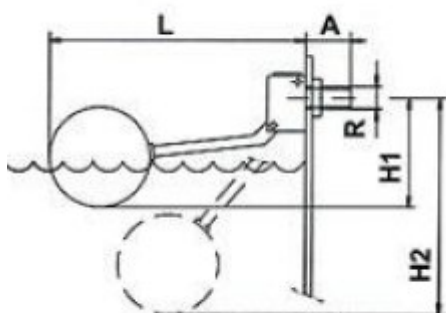

MATERIAL LIST

1	Body:	SS 316
3	Stopper:	SS 316
7	Locking Device:	SS 316
8	Handle:	SS 316

DIMENSIONS

AVOL REF	SIZE	PN	A	L	H1	H2	Wt
2856N-03	3/8"	10	32	300	83	90	0.35
2856N-04	1/2"	10	35	410	127	110	0.55
2856N-05	3/4"	10	42	500	155	160	1.00
2856N-06	1"	10	45	580	174	160	1.05
2856N-07	1 1/4"	10	52	580	164	160	1.25
2856N-08	1 1/2"	10	60	620	253	200	3.45
2856N-09	2"	10	70	720	255	200	3.75
2856N-10	2 1/2"	10	80	720	277	200	4.40

D