




GENEBRE PART:3318 PRESSURE REDUCING VALVE



SPECIFICATIONS

1	Piston Working
2	Maximum working pressure 25 bar
3	Temperature range 0°C to 130°C
4	<i>Adjusting outlet pressure depends on to the reducer size (setting pressure 3 bar): Size from 1/2" to 3/4" – From 0,5 bar to 5 bar. Size from 1" to 4" – From 0.5 bar to 8 bar.</i>
5	CW617N Brass body construction
6	AISI 304 Stainless steel seat
7	ISO 228/1 F-F threaded ends
8	1/4" inlets for pressure gauge to control outlet pressure
9	For use with water and compressed air

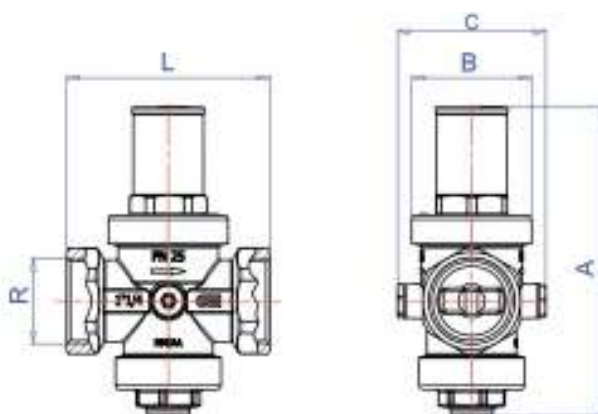

DIMENSIONS

AVOL REF	SIZE Inches	A mm	L mm	OB mm	C mm	Wt Kg
3318 04	1/2"	114,5	69,5	48	63,5	0.565
3318 05	3/4"	114,5	82	48	63,5	0.59
3318 06	1"	146	96	59	73,5	1.015
3318 07	1 1/4"	152	100	59	73,5	1.16
3318 08	1 1/2"	148,5	91	59	77	1.325
3318 09	2"	150,5	91	59	81	1.44
3318 10	2 1/2"	263,5	147	76	112	3.99
3318 11	3"	285	179	82,5	112	5.5
3318 12	4"	325	189	88,5	124	6.85