



ISO 9001
SERIES 90

Fire Safe
API 607 4th Edition
Certified



HIGH PERFORMANCE FLANGED BALL VALVE

DESIGN ADVANTAGES

- MOUNTING PAD TO DIN 3337 / ISO 5211 WITH CENTER RING
- EXTRA HIGH CYCLE LIFE
Mars maintenance free live loaded double sealing high cycle stem packing system provides extra longer service life.
- ANTI-STATIC DEVICE
Standard applied between stem and body, stem and ball
- BLOW OUT PROOF STEM
- FIRE TESTED PER API 607 4TH EDITION
- INVESTMENT CAST BODY CONSTRUCTION

APPLICATIONS

Chemical, Petrochemical, Oil and Gas production, Refining, Pulp & Paper, Food industry and others.

SPECIFICATIONS

Construction : Two-Piece Body, Full Bore
Size : 1/2" to 4" (DN 15 to DN 100)
Body : CF8M, WCB / DIN 1.4408, 1.0619
Ball and Stem : 316 S.S.
Seat : Reinforced PTFE

STANDARDS



Design : ANSI B16.34, BS5351, DIN 3337
Face to face : ANSI B16.10, DIN 3202 F1, F4 / F5
Flange dimensions : ANSI B16.5
DIN 2632/2633 & DIN 2634/2635
Pipeline valves : API 6D
Pressure testing : API 598
Fire testing : API 607 4th Edition, BS5351
Mounting pad : ISO 5211
Marking system for valves : MSS SP-25
Material Certification : EN 10204 / DIN 50.049-3.1B
Quality Assurance : ISO 9001

VALVE RATING AND FIG. NO.:

FIG. 90-10 ANSI CLASS 150#
FIG. 90-20 ANSI CLASS 300#
FIG. 90-30 DIN PN 10/16 (DIN 3202 F1)
FIG. 90-40 DIN PN 10/16 (DIN 3202 F4/F5)
FIG. 90-50 DIN PN 25/40 (DIN 3202 F1)
FIG. 90-60 DIN PN 25/40 (DIN 3202 F4/F5)

NO.	PART NAME	MATERIAL	QTY
1	Body	ASTM A351 Gr. CF8M	1
2	End Cap	ASTM A351 Gr. CF8M	1
3	Ball	SUS316	1
4	Stem	SUS316	1
5	Stem Nut	SUS304	2
6	Bellville Washer	SUS301	2
7	Handle	SUS304	1
8	Seat	RPPTFE	2
9	Gland	SUS304	1
10	V-Ring Packing	PTFE	3
11	Stem Seal	RPPTFE	1
12	Lock Saddle	SUS304	1
13	Joint Gasket	PTFE	1
14	Bolt(Stud & Nut)	SUS304	4
15	Stop Pin	SUS304	1
16	Handle Sleeve	Vinyl	1
17	Gland Packing	25% RTFE	1
18	Washer	SUS304	1
19	Locking Device	SUS304	1
20	Locking Plate	SUS304	1

§ 1/2"-3/4", 1 Set of v-ring packing consists of 2pcs of v-ring 1"-4", 1 Set of v-ring packing consists of 3pcs of v-ring
* For 1/2"-3" Apcs of ball ; For 4" 8 pcs of ball (150 LBS)
For 1/2"-2 1/2" Apcs of ball ; For 3"-4" 8 pcs of ball (PN 16)
For 1/2"-2" Apcs of ball ; For 2 1/2"-4" 8 pcs of ball (PN 40)

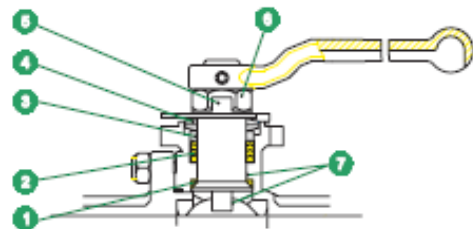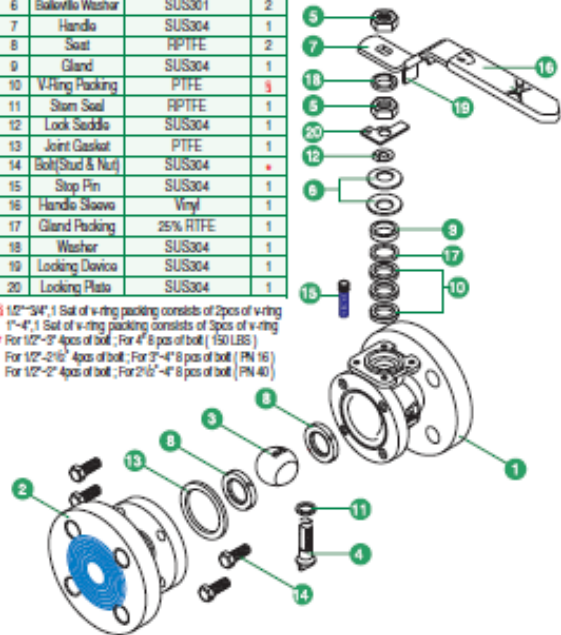

MAINTENANCE FREE LIVE LOADED DOUBLE SEALING HIGH CYCLE STEM DESIGN PROVIDES OPTIMUM SEALS

1. PYRAMIDAL STEM WITH STEM SEAL

First stage of defense against leakage. The 45 degree slope of the stem accompany by the stem seal effectively blocks all leak path from forming during rotation.

2. V-RING STEM PACKING

Second stage of defense against leakage. Triple layers of V-Ring Chevron packing expands side ways as it is being compressed, blocking all air pockets thus preventing leak path. The grinding effect of metal to PTFE contact.

3. GLAND

Made of stainless steel, equally distributes the compressive force on the packing and the seal.

4. BELLEVILLE WASHER

Release stored compressive energy for automatic compensation of seals due to wear and tear fluctuation of temperature and pressure.

5. LOCK SADDLE

Stabilizes the stem nut to keep it from loosening.

6. STEM NUT

Compress the entire stem system to enable blocking of leakage.

7. ANTI-STATIC DEVICE

Standard applied between stem and ball, stem and body.



ALLVALVES SERIES MARS – 88 SERIES BALL VALVE

www.allvalves.co.uk

TYPE MARS: M88


DIMENSIONS (mm)



V-VIEW



Pyramidal Stem & Anti-static Device

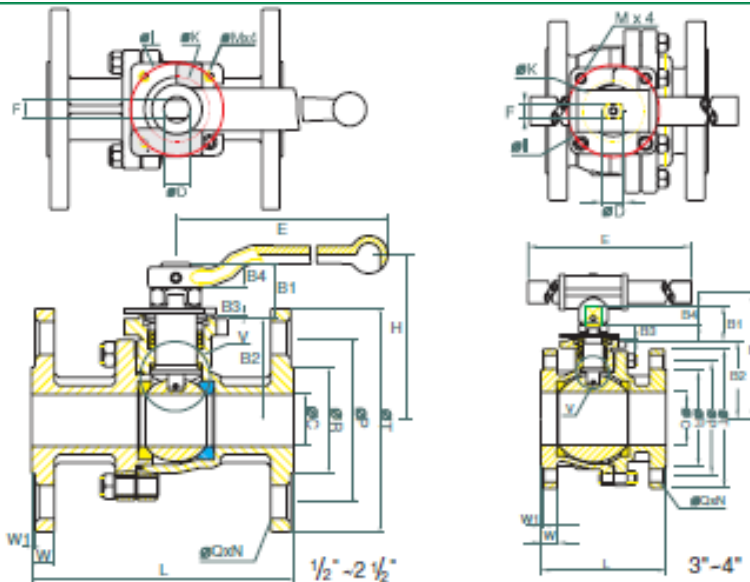

SERIES 90-10/20

SIZE	B1+0.3	B2	B3	B4+0.15	ØC	ØD	E	F	H	ØI	ØK	L	L'	M	N	N'	ØP	ØP'	ØQ	ØQ'	ØR	ØT	ØT'	W	W'	W1	W(kg)	ISO5211
1/2"	22.4	34.5	1	9.8	15.0	11.1	165	8.0	60.6	42	30	108.3	140	M5(10-24UNC)	4	4	60.5	66.5	16	16	35.1	88.9	95	11.2	14.3	1.6	1.69	F04
3/4"	21.4	41.1	1	8.8	20.0	11.1	165	8.0	67.21	42	30	117.3	152	M5(10-24UNC)	4	4	66.9	82.5	16	19	42.9	98.6	117	11.1	15.9	1.5	2.1	F04
1"	26.5	49.5	2	9.6	25.0	14.3	200	9.7	82.9	50	35	127.0	165	M6(1/4"-20UNC)	4	4	79.2	88.9	16	19	50.8	108	124	11.2	17.5	1.6	3.02	F05
1 1/4"	34.8	79.3	2	14.8	38.0	19.0	250	12.0	115.3	70	55	165.1	190	M6(5/16"-18UNC)	4	4	96.8	114.3	16	22	73.2	127	155	14.3	20.7	1.6	6.17	F07
1 1/2"	34.8	86.4	2	14.8	50.0	19.0	250	12.0	123.4	70	55	178.3	216	M6(5/16"-18UNC)	4	8	120.7	127.0	19	19	91.9	152.4	165	15.9	22.3	1.6	8.7	F07
2"	34.8	97.4	2	14.8	65.0	19.0	250	12.0	134.4	70	55	190.3	241	M6(5/16"-18UNC)	4	8	136.7	149.0	19	22	104.6	177.8	190	17.6	25.4	1.6	13.82	F07
3"	46.0	107.4	2	21.8	80	24.0	354	15.0	176.5	102	70.0	203.5	283	M10(3/8"-16UNC)	8	8	152.4	168.1	19	22	127	190.5	210	19.1	26.6	1.6	18.58	F10
4"	46.5	122.4	2	21.8	100	24.0	354	15.0	191	102	70.0	229.5	305	M10(3/8"-16UNC)	8	8	190.5	200.1	19	22	157.2	228.6	254	23.9	31.8	1.6	29.5	F10

B1, H: 1m/m

SERIES 90-30/40

SIZE	B1+0.3	B2	B3	B4+0.15	ØC	ØD	E	F	H	ØI	ØK	L	L'	M	N	N'	ØP	ØQ	ØR	ØT	W	W1	W(kg)	ISO5211
1/2"	22.4	34.5	1	9.8	15.0	11.1	165	8.0	60.6	42	30	115.3	130	M5	4	4	65	14	45	95	16	2	2.23	F04
3/4"	21.4	42.3	1	8.8	20.0	11.1	165	8.0	67.4	42	30	120.3	150	M5	4	4	75	14	58	105	18	2	3.1	F04
1"	26.5	49.5	2	9.6	25.0	14.3	200	9.7	82.9	50	35	125.5	160	M6	4	4	85	14	68	115	18	2	4.11	F05
1 1/4"	26.5	54.5	2	9.6	32.0	14.3	200	9.7	88	50	35	130.3	-	M6	4	4	100	18	78	140	18	2	5.56	F05
1 1/2"	34.8	78.0	2	14.8	38.0	19.0	250	12.0	115	70	55	140	200	M6	4	110	18	88	150	16	3	7.64	F07	
2"	34.8	86.7	2	14.8	50.0	19.0	250	12.0	123.7	70	55	150	230	M6	4	125	18	101.9	165	18	3	9.45	F07	
2 1/2"	34.8	98.0	2	14.8	65.0	19.0	250	12.0	135	70	55	170.5	290	M6	4	145	18	122.4	185	18	3	13.93	F07	
3"	46.5	106.0	2	21.3	80	24.0	354	15.0	177.2	102	70.0	180.5	310	M10	8	160	18	136.4	200	20	3	18.59	F10	
4"	46.5	123.0	2	21.3	100	24.0	354	15.0	182.2	102	70.0	190.5	350	M10	8	180	18	156	220	20	3	25.86	F10	

* Dimension for ANSI Class 300
B1, H: 1m/m

SERIES 90-50/60

SIZE	B1+0.3	B2	B3	B4+0.15	ØC	ØD	E	F	H	ØI	ØK	L	L'	M	N	N'	ØP	ØQ	ØR	ØT	W	W1	W(kg)	ISO5211
1/2"	22.4	34.5	1	9.8	15.0	11.1	165	8.0	60.6	42	30	115.3	130	M5	4	4	65	14	45	95	16	2	2.23	F04
3/4"	21.4	42.3	1	8.8	20.0	11.1	165	8.0	67.4	42	30	120.3	150	M5	4	4	75	14	58	105	18	2	3.10	F04
1"	26.5	49.5	2	9.6	25.0	14.3	200	9.7	82.9	50	35	125.5	160	M6	4	4	85	14	68	115	18	2	4.11	F05
1 1/4"	26.5	54.5	2	9.6	32.0	14.3	200	9.7	88.0	50	35	130.3	-	M6	4	4	100	18	78	140	18	2	5.56	F05
1 1/2"	34.8	78.0	2	14.8	38.0	19.0	250	12.0	115.0	70	55	140.3	200	M6	4	110	18	88	150	18	3	7.64	F07	
2"	34.8	86.7	2	14.8	50.0	19.0	250	12.0	123.7	70	55	150.3	230	M6	4	125	18	102	165	20	3	10.15	F07	
2 1/2"	34.8	98.0	2	14.8	65.0	19.0	250	12.0	135	70	55	170.3	290	M6	8	145	18	122	185	22	3	15.30	F07	
3"	46.0	106.0	2	21.8	80	24.0	354	15.0	177.1	102	70.0	180.3	310	M10	8	160	18	136	200	24	3	20.3	F10	
4"	46.5	123.0	2	21.8	100.0	24.0	354	15.0	191.7	102	70.0	190.3	350	M10	8	180	22	162.6	236	24	3	28.92	F10	

* Dimension for F1
B1, H: 1m/m

HOW TO ORDER

90-40 07 S R PL

VALVE TYPE		SIZE		MATERIAL		SEAT		HANDLE	
FIG. 90-10	ANSI 150#	03	1/2"	S	CF8M	P	PTFE	IC	304 S.S. Investment Cast Handle without Vinyl Sleeve
FIG. 90-20	ANSI 300#	04	3/4"	W	WCB	R	R-PTFE	PL	304 S.S. Plated Handle with Vinyl Sleeve
FIG. 90-30	PN 10/16 F1	05	1"	F	CF8	S	50/50 S.S. filled PTFE		
FIG. 90-40	PN 10/16 F4	06	1 1/4"	F	CF8	C	Carbon filled PTFE		
FIG. 90-50	PN 25/40 F1	07	1 1/2"	L	CF3M	M	MG1241		
FIG. 90-60	PN 25/40 F4	08	2"			D	Delrin		
		09	2 1/2"			U	UHMWPE		
		10	3"						
		11	4"						

Tel: 01386 552369

Fax: 01386 554227

sales@allvalves.co.uk

Allvalves Online Ltd, Automation House, Unit 2, Pershore, WR10 2DF UK