




STAINLESS STEEL VALVES

GENEBRE PART: 2445 'CROMAX' 316SS CHECK VALVE, 16 BAR




SPECIFICATIONS


1	Material 316 Stainless Steel
2	Ends threaded in accordance with DIN 259
3	Max working pressure 16 Bar
4	Max Temperature -20 to +150°C
5	TIG welded construction
6	Minimum opening pressure 0.025 Bar, maximum 0.035 Bar




1/4" - 3/8"



1/2"



3/4" - 2"




2" 1/2 - 4"

MATERIALS

Threaded Ends	AISI 316
Body	AISI 316
Disc	AISI 316
Bush	PTFE
Bush Support	AISI 316
Spring	AISI 316
Seal Ring	Viton
Seal Ring Retainer	AISI 316
Seal Ring Support	AISI 316
Side Guide	AISI 316

DIMENSIONS


AVOL REF	SIZE	A mm	B mm	L mm	Wt Kg
2445 02	1/4"	25	32	55	1.25
2445 03	3/8"	25	32	55	1.12
2445 04	1/2"	25	32	55	0.95
2445 05	3/4"	29	44	70	0.13
2445 06	1"	36	53	84	0.19
2445 07	1 1/4"	45	62	99	0.28
2445 08	1 1/2"	51	78	119	0.39
2445 09	2"	64	89	123	0.70
2445 10	2 1/2"	80	113	147	1.43
2445 11	3"	93	132	166	2.09
2445 12	4"	120	167	193	3.42

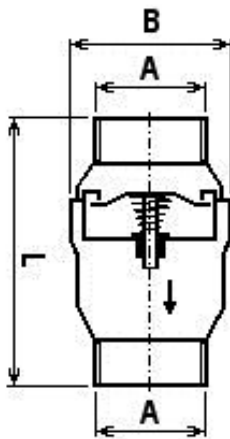




GENEBRE PART: 2445 'CROMAX' 316SS CHECK VALVE, 16 BAR

PRESSURE/ TEMPERATURE CHART

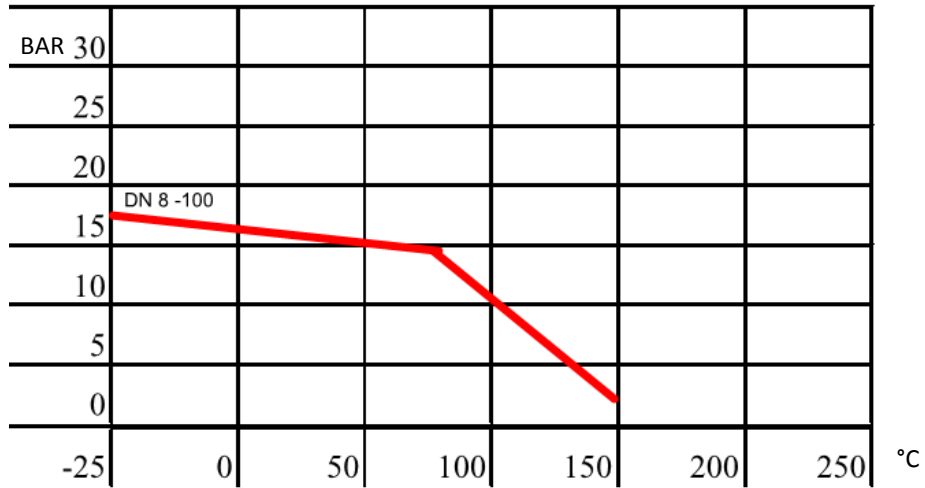

HEAD LOSS DIAGRAM

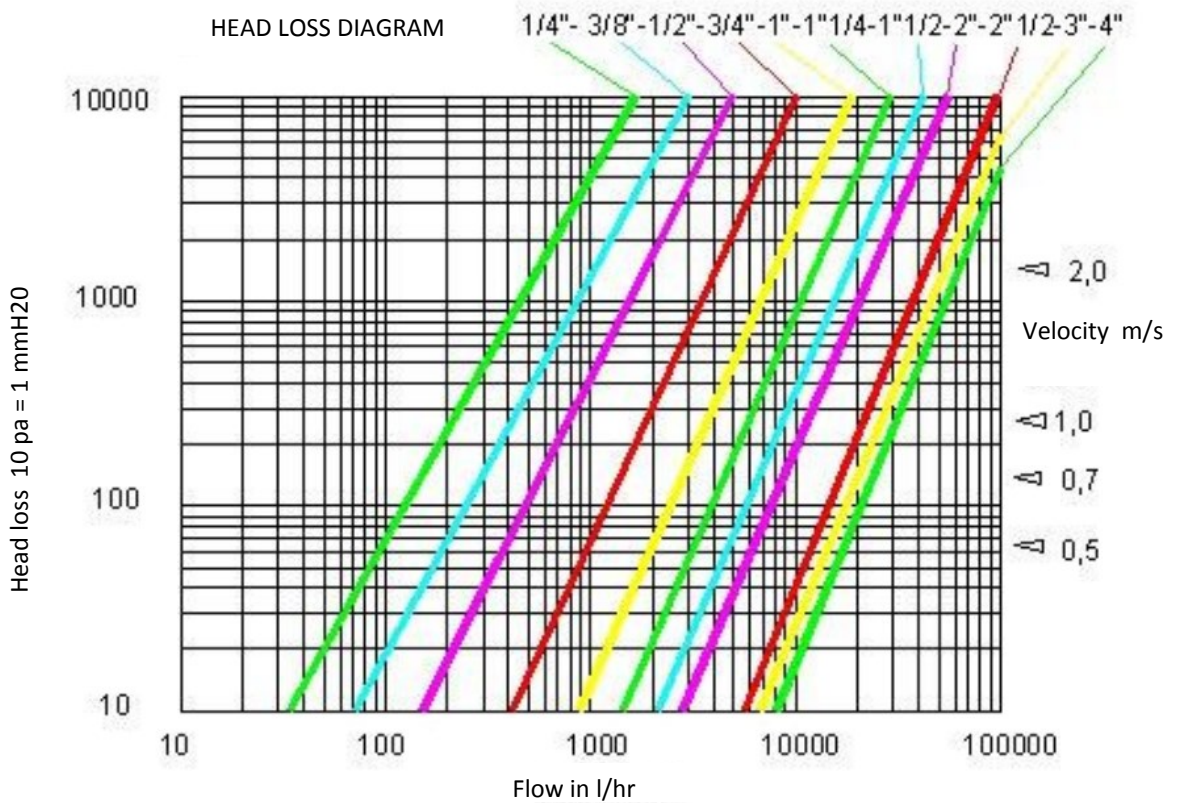

Uncontrolled copy. Not subject to automatic updates. Subject to change without notice. AVOL 4-2011 Rev 0