




STAINLESS STEEL VALVES

GENEBRE PART: 2528A 2 PCE FULL BORE BALL VALVE FLANGED ASA150 (DIRECT MOUNT)



SPECIFICATIONS

1	Material SS 316 CF8M
2	Ends according to ANSI B 16.5 Class 150
3	Max working pressure 19 BAR (See PxT chart below)
4	Max Temperature -30°C to + 180°C
5	Full bore
6	Anti-static device, fire-safe design
7	R PTFE seats, PTFE & graphite seals, + Viton stem O ring.
8	Belville washer securing stem nut protected by lock washer
9	Direct mount ISO5211 patent 9900474 respected

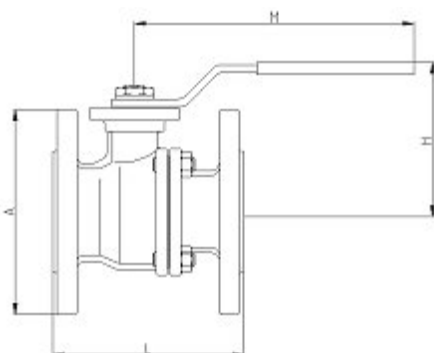

DIMENSIONS

AVOL REF	SIZE mm	L mm	H Mm	ISO5211 / stem	Torque Nm *	Wt Kg
2528A 04	1/2"	108	79	F04 x 9	5	1.50
2528A 05	3/4"	117	84	F04/05 x 9	8	1.93
2528A 06	1"	127	95	F04/05 x 11	10	2.66
2528A 07	1 1/4"	140	103	F05/07 x 14	14	3.98
2528A 08	1 1/2"	165	111	F05/07 x 14	20	5.41
2528A 09	2"	178	120	F05/07 x 14	30	8.01
2528A 10	2 1/2"	190	153	F07/10 x 17	36	14.93
2528A 11	3"	203	163	F07/10 x 17	60	18.70
2528A 12	4"	229	182	F07/10 x 17	95	30.35
2528A 14	6"	394	280	F12 x 27	210	75.25
2528A 16	8"	457	TBC	F12 x 27	400	134.50

* Torque is without safety.

PRESSURE/ TEMPERATURE CHART

