




STAINLESS STEEL VALVES

GENEBRE PART: 2528 2 PCE FULL BORE BALL VALVE FLANGED PN16 (DIRECT MOUNT)



SPECIFICATIONS

1	Material SS 316 CF8M
2	Ends according to DIN 2501
3	Max working pressure 40 BAR (See PxT chart below)
4	Max Temperature -30°C to + 180°C
5	Full bore
6	Anti-static device, fire-safe design
7	R PTFE seats, PTFE & graphite seals, + Viton stem O ring.
8	Belville washer securing stem nut protected by lock washer
9	Direct mount ISO5211 patent 9900474 respected

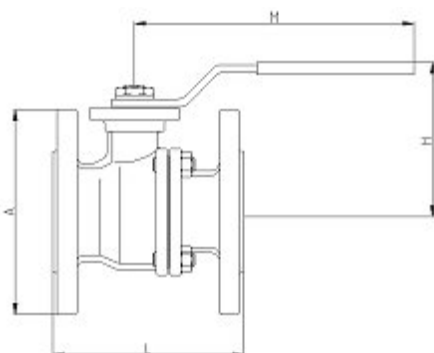

DIMENSIONS

AVOL REF	SIZE mm	PN	L mm	H Mm	ISO5211 / stem	Torque Nm *	Wt Kg
2528 04	1/2"	40	115	85	F04 x 9	5	2.20
2528 05	3/4"	40	120	85	F04/05 x 9	8	3.05
2528 06	1"	40	125	95	F05/07 x 14	10	3.75
2528 07	1 1/4"	40	130	106	F05/07 x 14	14	5.75
2528 08	1 1/2"	40	140	110	F05/07 x 14	20	7.00
2528 09	2"	40	150	118	F05/07 x 14	30	9.50
2528 10	2 1/2"	16	170	170	F07/10 x 17	36	14.75
2528 11	3"	16	180	170	F07/10 x 17	60	18.85
2528 12	4"	16	190	170	F07/10 x 17	95	26.25
2528 13	5"	16	325	200	F10/12 x 27	150	43.65
2528 14	6"	16	352	250	F10/12 x 27	210	60.8
2528 16	8"	16	400	300	F12 x 30	400	106.70

* Torque is without safety.

