




STAINLESS STEEL VALVES

GENEBRE PART: 2540 3 WAY L FULL BORE BALL VALVE FLANGED PN16 (DIRECT MOUNT)



SPECIFICATIONS

1	Material SS 316 CF8M
2	Ends according to DIN 2501 PN40
3	Max working pressure 40 BAR (See PxT chart below)
4	Max Temperature -25°C to + 180°C
5	Full bore
6	Anti-static device
7	R PTFE seats, PTFE seals, + Viton stem O ring.
8	Belville washer securing stem nut protected by lock washer
9	Direct mount ISO5211 patent 9900474 respected

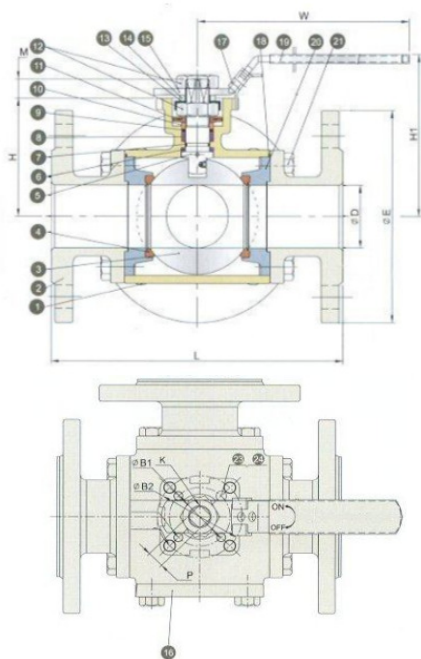


DIMENSIONS

AVOL	SIZE	L	H	ISO5211	Torque	Wt
REF	mm	mm	Mm	/ stem	Nm *	Kg
2540 06	1"	180	70.0	F04/05 X 11	21	7.80
2540 07	1 1/4"	190	77.5	F04/07 X 11	27	11.60
2540 08	1 1/2"	212	86.5	F05/07 X 14	37	14.70
2540 09	2"	230	92.0	F05/07 X 14	51	19.70
2540 10	2 1/2"	290	107.0	F07/10 X 17	81	29.70
2540 11	3"	310	119.0	F07/10 X 17	130	42.00
2540 12	4"	350	150.0	F10 X 22	220	60.30

* Torque is without safety and constant (4 ball seats)

FLOW PATH DIAGRAM



PRESSURE/ TEMPERATURE CHART

