



STAINLESS STEEL VALVES


GENEBRE PART: 2040 3 WAY L PORT REDUCED BORE BALL VALVE BSP (DIRECT MOUNT)



SPECIFICATIONS

1	Material SS 316 CF8M
2	Threaded ends according to DIN 2999
3	Max working pressure 63 BAR (See PxT chart)
4	Max Temperature -25°C to + 180°C
5	Full bore
6	See below for flow path options
7	R PTFE seats & PTFE seals, + Viton O ring stem seal
8	Belville washer securing stem nut protected by lock washer
9	Direct mount ISO5211 patent 9900474 respected

FLOW PATHS

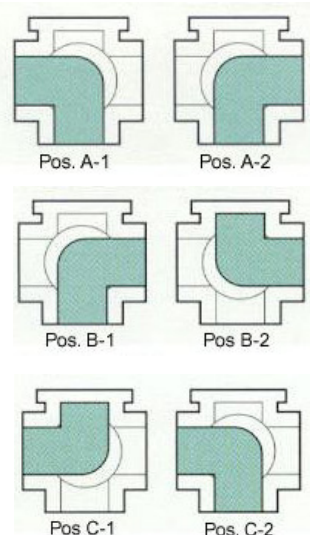


DIMENSIONS

AVOL REF	SIZE mm	L mm	H mm	H1 mm	ISO5211 / stem	Torque Nm *	Wt Kg
2040 02	1/4"	75	37	66	F03/04 x 9	8	0.70
2040 03	3/8"	75	37	66	F03/04 x 9	8	0.67
2040 04	1/2"	75	37	66	F03/04 x 9	8	0.63
2040 05	3/4"	88	41	72	F04/05 x 11	9	1.17
2040 06	1"	100	47	77	F04/05 x 11	18	1.38
2040 07	1 1/4"	122	56	92	F05/07 x 14	21	2.91
2040 08	1 1/2"	131	60	96	F05/07 x 14	26	3.68
2040 09	2"	158	71	107	F05/07 x 14	35	6.31
2040 10	2 1/2"	178	TBC	TBC	F07/10 X 17	55	8.95

* Torque is without safety.

DIMENSIONS

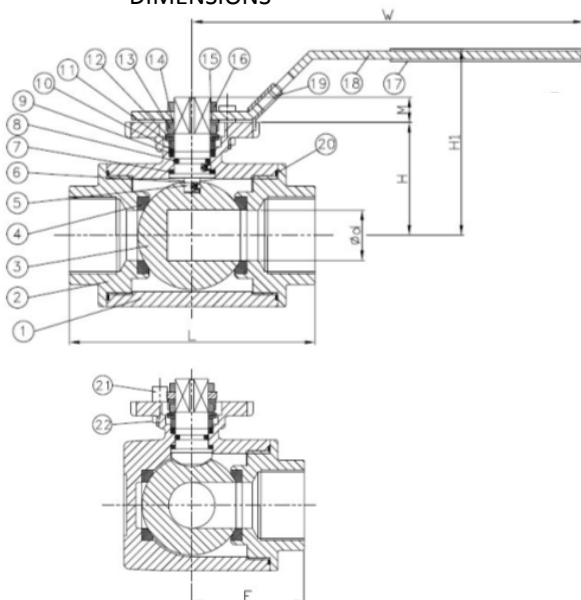

PRESSURE/ TEMPERATURE CHART

