




STAINLESS STEEL VALVES

GENEBRE PART: 2430N SWING CHECK VALVE, 150LB, NPT




SPECIFICATIONS

1	Material CF8M (316 Stainless Steel)
2	Ends threaded in accordance with ANSI B 2.1 NPT
3	Max working pressure 150 lbs
4	Max Temperature +180°C

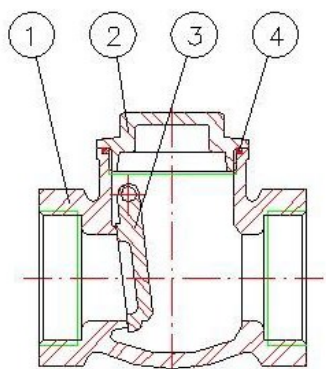

MATERIALS

1	CF8M
2	CF8M
3	CF8M
4	PTFE
5	AISI316

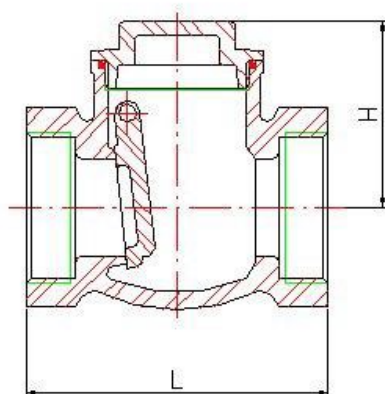


DIMENSIONS

AVOL	SIZE	PN	H	L	Wt
REF		Bar	mm	mm	Kg
2430 04	1/2"	16	44	65	0.31
2430 05	3/4"	16	53	80	0.49
2430 06	1"	16	58	90	0.72
2430 07	1 1/4"	16	62	105	1.04
2430 08	1 1/2"	16	73	120	1.65
2430 09	2"	16	78	141	2.39



GENEBRE PART: 2430N SWING CHECK VALVE, 150LB, NPT

PRESSURE/ TEMPERATURE CHART

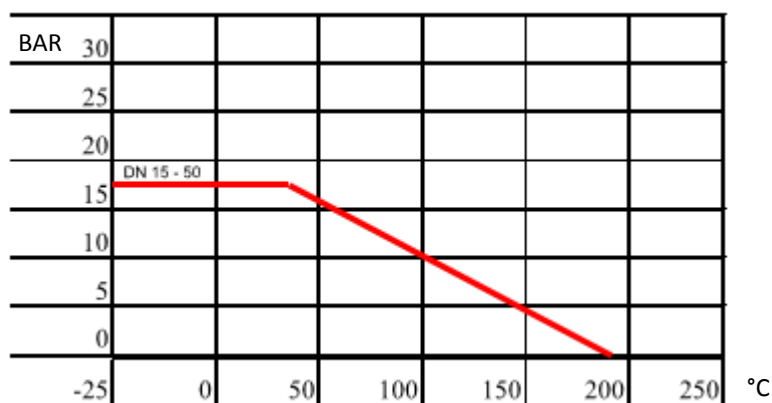

HEAD LOSS DIAGRAM

