




STAINLESS STEEL VALVES

GENEBRE PART: 2440 'CROMAX' 304SS CHECK VALVE, 16 BAR




SPECIFICATIONS


1	Material 304 Stainless Steel
2	Ends threaded in accordance with DIN 259
3	Max working pressure 16 Bar
4	Max Temperature -20 to +150°C
5	TIG welded construction
6	Minimum opening pressure 0.025 Bar, maximum 0.035 Bar




1/4" - 3/8"



1/2"



3/4" - 2"




2" 1/2" - 4"

MATERIALS

Threaded Ends	AISI 304
Body	AISI 304
Disc	AISI 304
Bush	PTFE
Bush Support	AISI 304
Spring	AISI 304
Seal Ring	Viton
Seal Ring Retainer	AISI 304
Seal Ring Support	AISI 304
Side Guide	AISI 304

DIMENSIONS

AVOL	SIZE	A	B	L	Wt
REF		mm	mm	mm	Kg
2440 02	1/4"	20	32	55	0.13
2440 03	3/8"	20	32	55	0.12
2440 04	1/2"	25	32	55	0.09
2440 05	3/4"	29	44	70	0.13
2440 06	1"	36	53	84	0.19
2440 07	1 1/4"	45	62	99	0.28
2440 08	1 1/2"	51	78	119	0.40
2440 09	2"	64	89	123	0.70
2440 10	2 1/2"	80	113	147	1.40
2440 11	3"	93	132	166	2.10
2440 12	4"	120	167	193	3.40

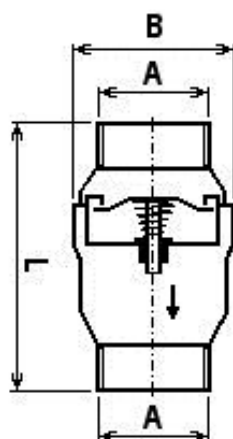





STAINLESS STEEL VALVES

GENEBRE PART: 2440 'CROMAX' 304SS CHECK VALVE, 16 BAR

PRESSURE/ TEMPERATURE CHART

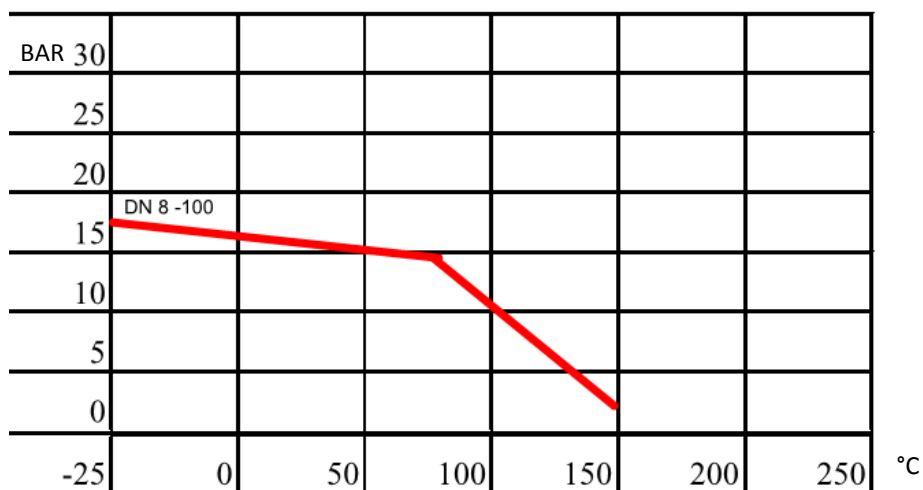

HEAD LOSS DIAGRAM

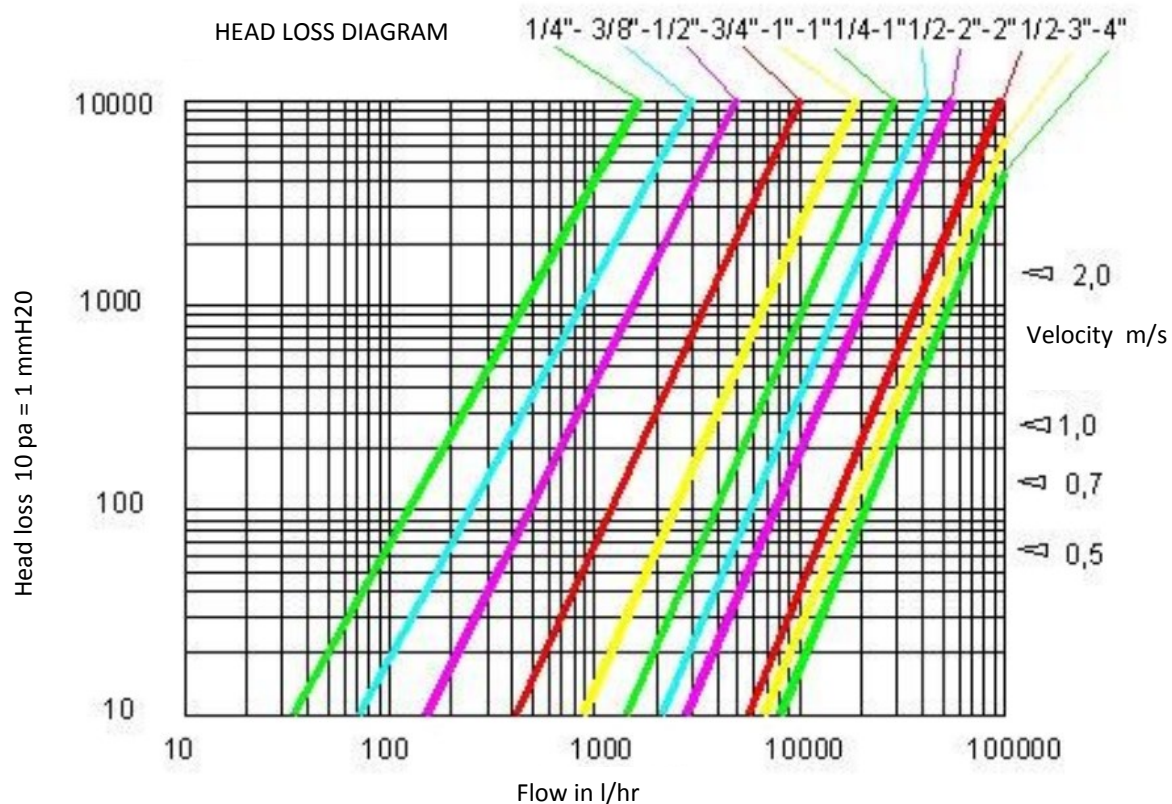

Uncontrolled copy. Not subject to automatic updates. Subject to change without notice. AVOL 4-2011 Rev 0