




STAINLESS STEEL VALVES

GENEBRE PART: 2447 FILTER FOR 'CROMAX' 316SS CHECK VALVE




SPECIFICATIONS

1	Material 316 Stainless Steel
2	Ends threaded in accordance with DIN 259
3	Max working pressure 16 Bar
4	Max Temperature -20 to +150°C
5	TIG welded construction

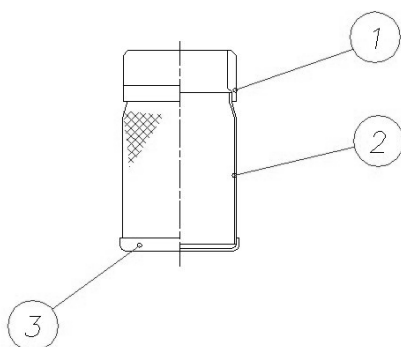

MATERIALS

1	AISI 316
2	AISI 316
3	AISI 316

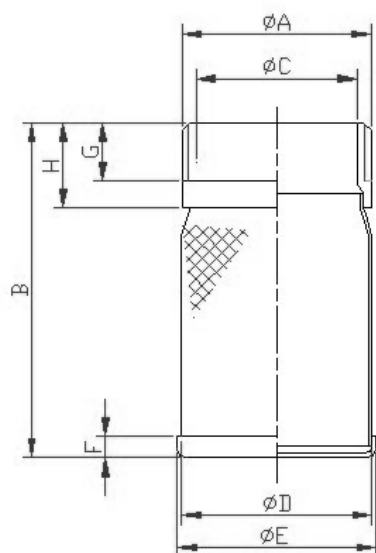

DIMENSIONS


AVOL	SIZE	B	C	E	Wt
REF	A	mm	mm	mm	g
2447 04	1/2"	56.5	17.5	23.0	16
2447 05	3/4"	62.5	22.0	29.0	22
2447 06	1"	70.0	28.5	37.0	34
2447 07	1 1/4"	80.0	36.5	44.0	54
2447 08	1 1/2"	90.0	42.5	49.0	64
2447 09	2"	100.0	54.5	62.0	96
2447 10	2 1/2"	115.0	70.5	80.5	136
2447 11	3"	125.0	83.0	93.0	156
2447 12	4"	145.0	108.0	117.0	202




STAINLESS STEEL VALVES

GENEBRE PART: 2447 FILTER FOR 'CROMAX' 316SS CHECK VALVE

FILTER MESH DETAIL

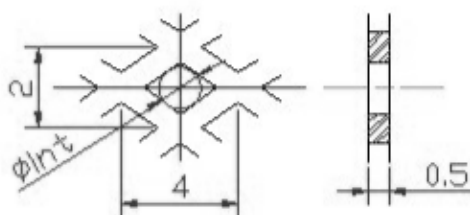

Filter 1/2" -> 2"
 ϕ_{int} max = 1mm.

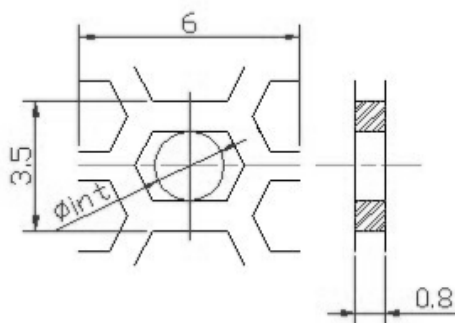

Filter 2 1/2" -> 4"
 ϕ_{int} max = 1.9mm.