




## STAINLESS STEEL VALVES

### GENEBRE PART: 2541 3 WAY T FULL BORE BALL VALVE FLANGED PN16 (DIRECT MOUNT)



#### SPECIFICATIONS


|   |                                                            |
|---|------------------------------------------------------------|
| 1 | Material SS 316 CF8M                                       |
| 2 | Ends according to DIN 2501 PN40                            |
| 3 | Max working pressure 40 BAR (See PxT chart below)          |
| 4 | Max Temperature -25°C to + 180°C                           |
| 5 | Full bore                                                  |
| 6 | Anti-static device                                         |
| 7 | R PTFE seats, PTFE seals, + Viton stem O ring.             |
| 8 | Belville washer securing stem nut protected by lock washer |
| 9 | Direct mount ISO5211 patent 9900474 respected              |

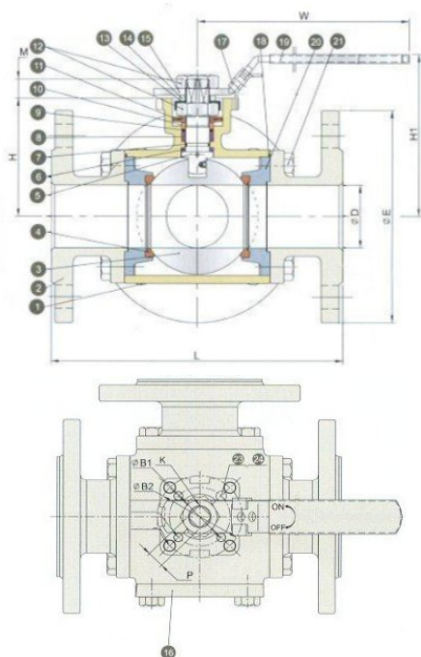

#### DIMENSIONS

| AVOL    | SIZE   | L   | H     | ISO5211     | Torque | Wt    |
|---------|--------|-----|-------|-------------|--------|-------|
| REF     | mm     | mm  | Mm    | / stem      | Nm *   | Kg    |
| 2541 06 | 1"     | 180 | 70.0  | F04/05 X 11 | 21     | 7.80  |
| 2541 07 | 1 1/4" | 190 | 77.5  | F04/07 X 11 | 27     | 11.60 |
| 2541 08 | 1 1/2" | 212 | 86.5  | F05/07 X 14 | 37     | 14.70 |
| 2541 09 | 2"     | 230 | 92.0  | F05/07 X 14 | 51     | 19.70 |
| 2541 10 | 2 1/2" | 290 | 107.0 | F07/10 X 17 | 81     | 29.70 |
| 2541 11 | 3"     | 310 | 119.0 | F07/10 X 17 | 130    | 42.00 |
| 2541 12 | 4"     | 350 | 150.0 | F10 X 22    | 220    | 60.30 |

\* Torque is without safety and constant (4 ball seats)

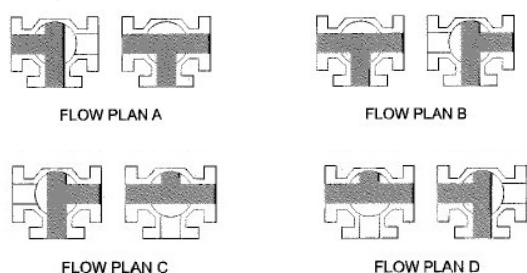

#### PRESSURE/ TEMPERATURE CHART

