




STAINLESS STEEL VALVES

GENEBRE PART: 2460 STAINLESS STEEL Y TYPE STRAINER, BSP




SPECIFICATIONS

1	Material CF8M (316 Stainless Steel)
2	Ends screwed BSP in accordance with DIN 2999
3	Max working pressure 40 Bar
4	Working temperature -30°C to +240°C

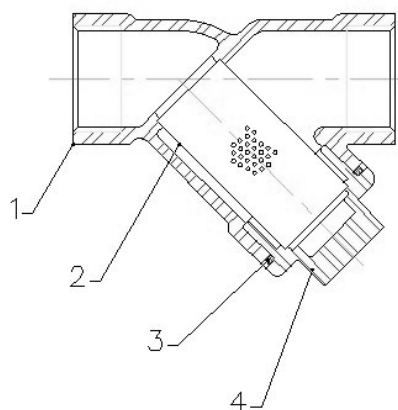

MATERIALS

1	CF8M (316 Stainless Steel)
2	CF8M (316 Stainless Steel)
3	PTFE
4	CF8M (316 Stainless Steel)

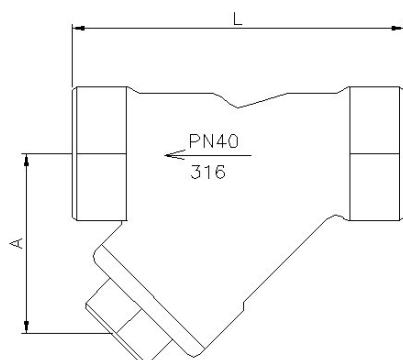

DIMENSIONS


AVOL REF	SIZE	A mm	L mm	Wt Kg
2460 02	1/4"	30	65	0.29
2460 03	3/8"	30	65	0.21
2460 04	1/2"	40	65	0.22
2460 05	3/4"	45	80	0.35
2460 06	1"	55	90	0.66
2460 07	1 1/4"	65	105	0.77
2460 08	1 1/2"	70	120	1.15
2460 09	2"	85	140	1.76



STAINLES STEEL VALVES

GENEBRE PART: 2460 STAINLESS STEEL Y TYPE STRAINER, BSP

HEAD LOSS DIAGRAM

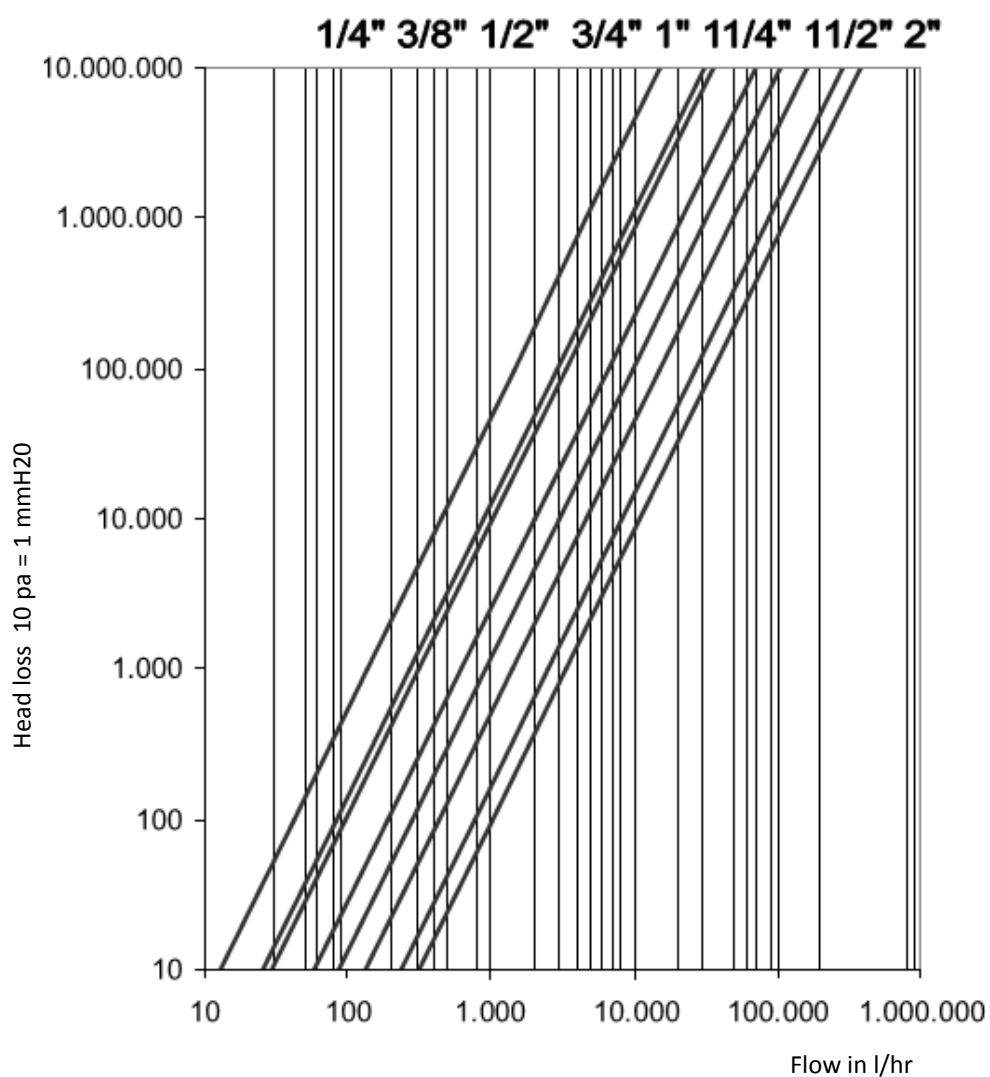

Kv FIGURES

D	Inch	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
Kv	m ³ /h	1,44	2,88	3,30	6,60	9,70	14,90	26,60	35,40