



## Sylax

Butterfly valves  
DN25 to 350 mm

**WRAS**  
APPROVED  
PRODUCT

### Summary



• Sale leaflet	p.2
• Spare parts list	p.3
• Overall dimensions	p.4
• Top connections of the actuators	p.6
• Actuators	p.7
• Connecting flanges	p.8
• Normalisation	p.10
• Pressure/Temperature	p.11
• Torque values	p.11
• Flow rate (Kv)	p.12
• Head loss chart ( $\Delta p$ )	p.13
• Type of flange	p.14
• Tag/Traceability	p.14
• Bolts and nuts	p.15
• Installation	p.17

### Applications and main characteristics

#### Industrial processes and general services

##### Applications :

- Water distribution and supply with the main European approvals, water treatment, most of the fluids of general services.
- Industrial applications such as :  
*Metallurgical, mining, paper-making, ship-building, nuclear, environmental and mechanical, food industry (see our list of approvals).*
- For special applications, especially for particularly difficult media, contact our technical back office team.

##### Main characteristics :

- Multiple connections : centering lugs, tapped lugs, central and double flange.
- Vertical and horizontal operating position.
- High power transmission with robust grooved connection between the shaft and the disc.
- Easy maintenance by removing the circlips
- Interchangeable disc and liner.
- Body in cast iron GJL1040, ductile iron GJS1030, steel and stainless steel.
- Body epoxy coated 80 $\mu$ m colour blue RAL 5017 (a lot of other coatings on option, please ask our sales department)
- Wide choice of actuators.

An instruction notice specifying the installation characteristics and the commission of the Sylax is added to every product when the ATEX version is specified; It is available on our web site [www.danfoss-socla.com](http://www.danfoss-socla.com) or on request by our sales department.




**Technical manual**    **Sylax**

**Sale leaflet**

By concentrating the technologies and by integrating technical solutions of the highest levels, Danfoss Socla fulfils its ambition :

- competitiveness of a standard range,
- reliability,
- comprehensive range thanks to a multiplicity of solutions.

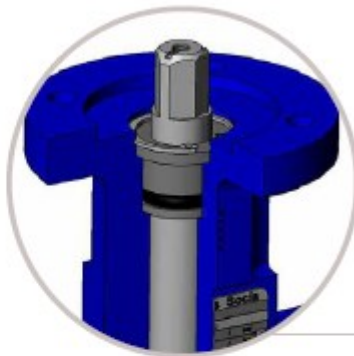

- Safety anti-ejection circlip keeps shaft in place and allows easy maintenance
- Safety reinforced by a secondary water-tightness.
- Spline driven one piece shaft connected to floating disc :

*. high reliability of tightness and torque transmission in the long term.*



- High power transmission with robust grooved connection between the shaft and the disc.
- Complete protection of the shaft and valve body from fluids.
- Reliability of movements with self-lubricating bearings.




- Identification and traceability ensured by riveted metal tag : see on page 14.



**Technical manual    Sylax**

**Spare parts list**

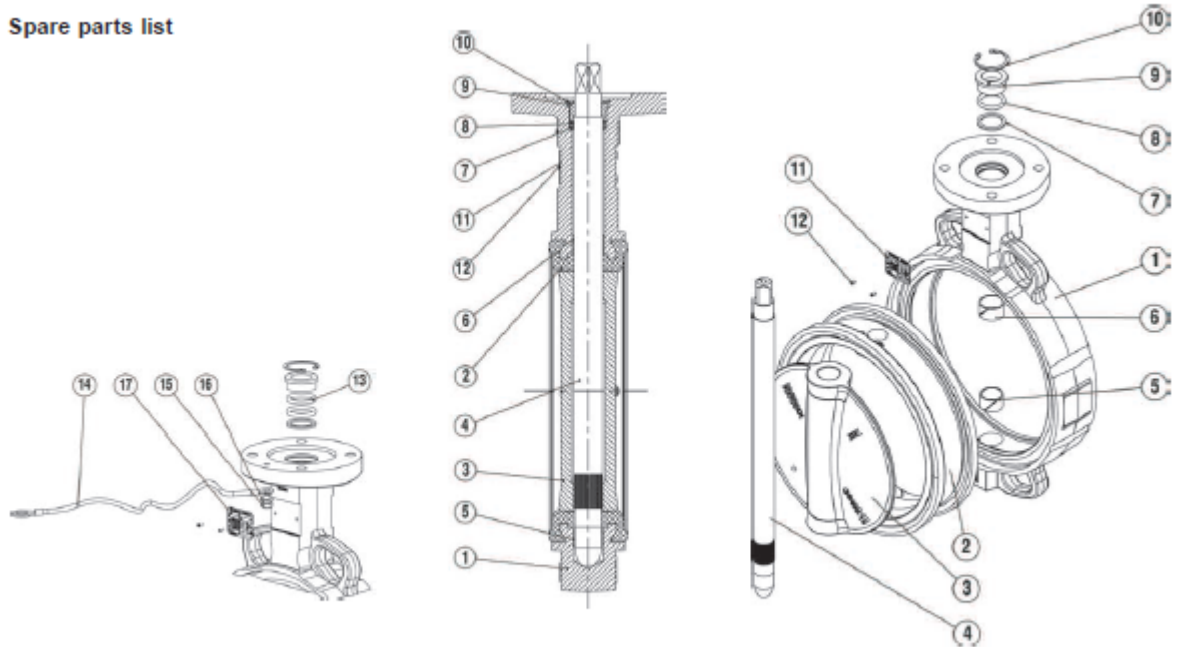

Nb	DESCRIPTION	Qty	MATERIALS ACCORDING TO NORMS			
			Materials	EN	ASTM	JIS
1	Body	1	Ductile iron	EN GJS 400-15 (JS 1030)	-	FCD40
			Cast iron	EN GJL 250 (JL 1040)	-	FC25
			Steel	GE 280 (E280 - 480M)	gr WCB	-
			Stainless steel	GX5 CrNiMo 19-11-2 (1.4408)	316	SUS 316
2	Liner	1	EPDM	-	-	-
			White EPDM	-	-	-
			High content nitrile	-	-	-
			White nitrile	-	-	-
			Carboxylated nitrile	-	-	-
			Hypalon	-	-	-
			Silicone	-	-	-
			FKM	-	-	-
			Butyl	-	-	-
			Natural rubber	-	-	-
3	Disc	1	Ductile iron	EN GJS 400-15 (JS 1030)	-	FCD40
			Stainless steel	GX5 CrNiMo 19-11-2 (1.4408)	316	SUS 316
			Stainless steel	X2 CrNiMo 17-12-2 (1.4404)	316L	SUS 316L
			Alu-bronze	CuAl10Fe5Ni5 (CC333G)	-	-
4	Stem	1	Stainless steel	X5 CrNiCuNb 18-4 (1.4542)	630	SUS 630
			Stainless steel	X2 CrNiMo 17-12-2 (1.4404)	316L	SUS 316L
			Stainless steel	X30 Cr13 (1.4028)	420	SUS 420 J2
5 - 6	Anti-friction bearing	1	Zinc coated steel + PTFE	-	-	-
7	Anti-extrusion bush	1	Stainless steel	X5 CrNi 18-10 (1.4301)	304	SUS 304
			Plastic	IXEF 50 FV	-	-
8	O-ring	1	Nitrile/FKM	-	-	-
9	Sealing washer	1	Plastic	IXEF 50 FV	-	-
			Stainless steel	X5 CrNi 18-10 (1.4301)	304	SUS 304
			Brass	CuZn39Pb2 (CW612N)	-	-
10	Circlips	1	Stainless steel	X30 Cr13 (1.4028)	420	SUS 420 J2
			Steel	XC 75	-	-
11	Identification plate	1	Aluminium	EN AW - AL995 (EN AW - 1050A)	-	-
12	Rivet	2	Alu / Stainless steel	-	-	-


**ATEX special spare parts list**

13	Braid	1	Tinned copper	-	-	-
14	Discharge anti-static braid	1	Tinned copper	-	-	-
15	Screw	1	Stainless steel	A2 - 70	304	SUS 304
16	Stop washer	1	Stainless steel	X5 CrNi 18-10 (1.4301)	304	SUS 304
17	ATEX identification plate	1	Aluminium	EN AW - AL995 (EN AW - 1050A)	-	-



Technical manual **Sylax**

Overall dimensions

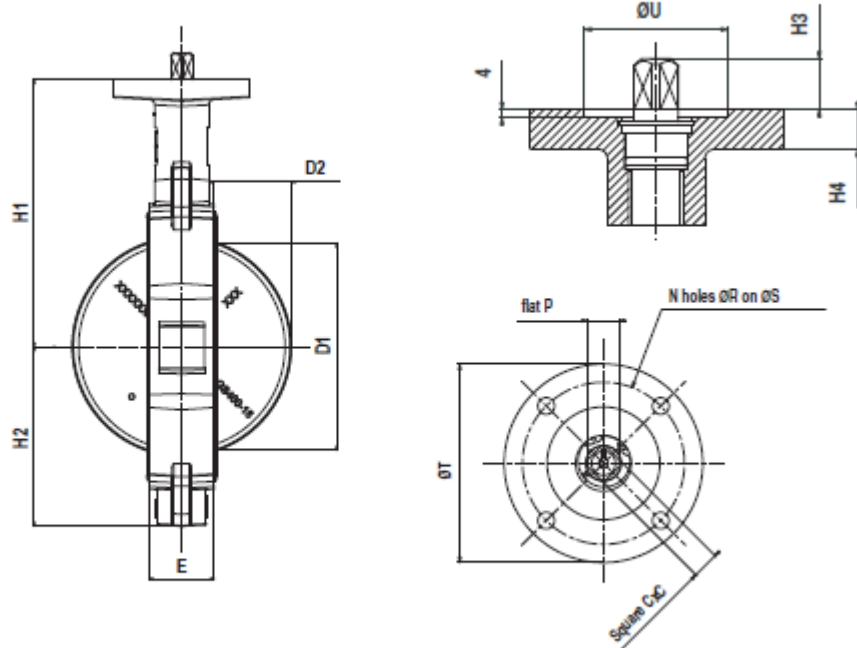


• 4 Centering lugs



Diameter		Face to face	Overall dimensions				Iso top according to ISO 5211						Square drive outlet			Travel of the disc		Weight Kg	
DN	NPS	E	L1	H1	H2	H4	N	Ø R	Ø S	Ø T	Ø U	N°	□ C	H3	plat P	D1	D2	(1)	(2)
25	1	32	100	125	50	12	4	8,5	50	65	38	F05	11	19	11	6	1	-	1,8
32/40	1 1/2	32	144	130	57	12	4	8,5	50	65	38	F05	11	19	11	31	6,5	1,9	1,7
50	2	43	121	136	62	12	4	8,5	50	65	38	F05	11	19	11	29	4,5	2,5	2,5
65	2 1/2	48	138	145	70	12	4	8,5	50	65	38	F05	11	19	11	48	10	2,7	2,9
80	3	48	127	151	89	12	4	8,5	50	65	38	F05	11	19	11	87	18	2,8	3,2
100	4	52	153	175	106	12	4	8,5	70	90	56	F07	14	19	14	88	25	4,0	5,2
125	5	56	182	190	120	12	4	8,5	70	90	56	F07	14	19	14	113	35	6,2	6,3
150	6	56	209	203	131	12	4	8,5	70	90	56	F07	14	19	14	141	48	7,1	7,3
200	8	60	265	245,5	164	15,5	4	10,5	102	125	71	F10	17	25	20	192	71	15,4	13,7
250	10	68	317	271	200	16	4	10,5	102	125	71	F10	22	32	26	242	91,5	19	20,1
300	12	78	370	298	235	16	4	12,5	125	150	87	F12	22	32	26	291	112	30,2	29,2
350	14	78	424	305	270	16	4	12,5	125	150	87	F12	27	35	-	331	132	35,9	36,2

(1) Ductile Iron body (J01030), ductile Iron disc (J01030), EPDM liner.  
 (2) Cast Iron body (JL1040), ductile Iron disc (J01030), EPDM liner.

• 2 Centering lugs

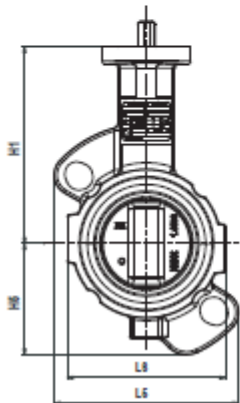


Diameter		Face to face	Overall dimensions				Iso top according to ISO 5211						Square shaft outlet			Travel of the disc		Weight Kg		
DN	NPS	E	L5	L6	H1	H5	H4	N	Ø R	Ø S	Ø T	Ø U	N°	□ C	H3	plat P	D1	D2	(1)	(2)
32/40	1 1/2	32	108	99	130	56	12	4	8,5	50	65	38	F05	11	19	11	31	6,5	1,7	1,6
50	2	43	121	99	138	73	12	4	8,5	50	65	38	F05	11	19	11	29	4,5	2,8	2,1
65	2 1/2	48	138	117	145	82	12	4	8,5	50	65	38	F05	11	19	11	48	10	3,1	2,4
80	3	48	150	138	151	93	12	4	8,5	50	65	38	F05	11	19	11	87	18	3,2	2,8
100	4	52	168	167	175	106	12	4	8,5	70	90	56	F07	14	19	14	88	25	5,3	4,4
125	5	56	132	194	190	127	12	4	8,5	70	90	56	F07	14	19	14	113	35	6,8	5,7
150	6	56	139	225	203	147	12	4	8,5	70	90	56	F07	14	19	14	141	48	8,1	6,8
200	8	60	164	279	245,5	174	15,5	4	10,5	102	125	71	F10	17	25	20	192	71	13,5	12,1
250	10	68	187	332	271	210	16	4	10,5	102	125	71	F10	22	32	26	242	91,5	20,5	18,1
300	12	78	166	382	298	239	16	4	12,5	125	150	87	F12	22	32	26	291	112	29,2	26
350	14	78	185	435	305	287	16	4	12,5	125	150	87	F12	27	35	-	331	132	37,5	-

(1) Stainless steel body (1.4406), stainless steel disc (1.4406), EPDM liner.  
 (2) Steel body (NCE), stainless steel disc (1.4406), EPDM liner.



Technical manual **Sylax**


Overall dimensions

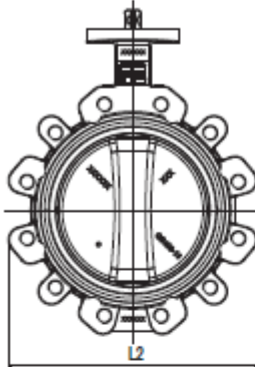

Tapped lugs

Diameter		Face to face	Overall dimensions				Iso top according to ISO 5211						Square shaft outlet			Travel of the disc		Weight Kg	
DN	NPS	E	L2	H1	H2	H4	N	Ø R	Ø S	Ø T	Ø U	N°	□C	H3	plat P	D1	D2	(1)	(2)
32/40	1 1/2	32	146	130	57	12	4	8,5	50	65	38	F05	11	19	11	31	6,5	1,9	2,7
50	2	43	121	136	62	12	4	8,5	50	65	38	F05	11	19	11	29	4,5	2,5	3,3
65	2 1/2	46	165	145	70	12	4	8,5	50	65	38	F05	11	19	11	48	10	2,7	3,9
80	3	46	179	151	89	12	4	8,5	50	65	38	F05	11	19	11	87	18	2,8	4,8
100	4	52	206	175	107	12	4	8,5	70	90	56	F07	14	19	14	88	25	4,9	7,2
125	5	56	238	190	124	12	4	8,5	70	90	56	F07	14	19	14	113	35	6,2	9,7
150	6	56	285	203	150	12	4	8,5	70	90	56	F07	14	19	14	141	48	7,1	11,2
200	8	60	336	245,5	179	15,5	4	10,5	102	125	71	F10	17	25	20	192	71	15,4	21,8
250	10	68	396	271	212	16	4	10,5	102	125	71	F10	22	32	26	242	91,5	19	28,1
300	12	78	462	296	244	16	4	12,5	125	150	87	F12	22	32	26	291	112	30,2	38,2
350	14	78	497	305	248	16	4	12,5	125	150	87	F12	27	35	-	331	132	46	-


(1) Ductile iron body (JIS1030), ductile iron disc (JIS1030), EPDM liner.  
 (2) Stainless steel body (1.4406), stainless steel disc (1.4406), EPDM liner.



• Double flange

Diameter		Face to face	Overall dimensions				Iso top according to ISO 5211						Square shaft outlet			Travel of the disc		Weight Kg
DN	NPS	E	L3	H1	H2	H4	N	Ø R	Ø S	Ø T	Ø U	N°	□C	H3	plat P	D1	D2	(1)
200	8	60	343,5	245,5	184	15,5	4	10,5	102	125	71	F10	17	25	20	192	71	18
250	10	68	408	271	200	16	4	10,5	102	125	71	F10	22	32	26	242	91,5	28
300	12	78	482,5	296	235	16	4	12,5	125	150	87	F12	22	32	26	291	112	44,4
350	14	78	533	305	270	16	4	12,5	125	150	87	F12	27	35	-	331	132	57,5


(1) Ductile iron body (JIS1030), ductile iron disc (JIS1030), EPDM liner.



• Central flange

Diameter		Face to face	Overall dimensions				Iso top according to ISO 5211						Square shaft outlet			Travel of the disc		Weight Kg
DN	NPS	E	L4	H1	H2	H4	N	Ø R	Ø S	Ø T	Ø U	N°	□C	H3	plat P	D1	D2	(1)
80	3	46	190,5	151	90	12	4	8,5	50	65	38	F05	11	19	11	87	18	3,9
100	4	52	228,5	175	107	12	4	8,5	70	90	56	F07	14	19	14	88	25	6,5
125	5	56	252	190	120,5	12	4	8,5	70	90	56	F07	14	19	14	113	35	8,1
150	6	56	278,5	203	132	12	4	8,5	70	90	56	F07	14	19	14	141	48	9,3
200	8	60	340,5	245,5	185	15,5	4	10,5	102	125	71	F10	17	25	20	192	71	16,3

(1) Ductile iron body (JIS1030), ductile iron disc (JIS1030), EPDM liner.



• Ring shaped type body


Diameter		Face to face	Overall dimensions				Iso top according to ISO 5211						Square shaft outlet			Travel of the disc		Weight Kg
DN	NPS	E	L6	H6	H7	H4	N	Ø R	Ø S	Ø T	Ø U	N°	□C	H3	plat P	D1	D2	(1)
50	2	43	104	99	88	12	4	8,5	50	65	38	F05	11	19	11	29	4,5	1,9
65	2 1/2	46	124	109	75	12	4	8,5	50	65	38	F05	11	19	11	48	10	2,4
80	3	46	140	115	82	12	4	8,5	50	65	38	F05	11	19	11	87	18	2,8
100	4	52	160	127	95	12	4	8,5	70	90	56	F07	14	19	14	88	25	4

(1) Ductile iron body (JIS1030), ductile iron disc (JIS1030), EPDM liner.



**Technical manual Sylax**

Connecting kit for actuations

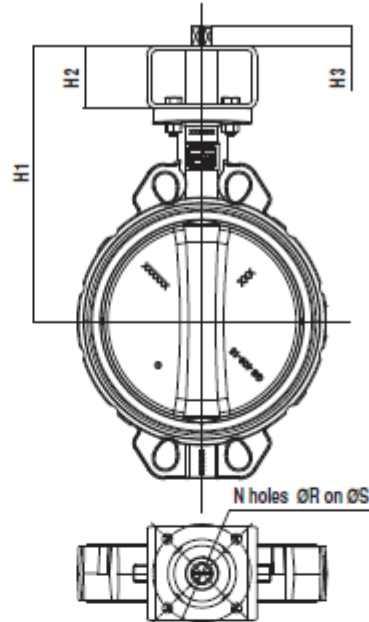

We recommend direct mounting of the actuation, otherwise see table below.

DN	NPS	Iso top of the valve	Iso top of the actuation															
			F03		F04		F05		F07		F10		F12		F14		F16	
			H1	H2	H1	H2	H1	H2	H1	H2	H1	H2	H1	H2	H1	H2	H1	H2
32	1 <sup>1/4</sup>	F05/□11	190		190		190		190		210							
40	1 <sup>1/2</sup>		190		190		190		190		210							
50	2		199	60	199		199	60	199	60	219							
65	2 <sup>1/2</sup>		204,5		204,5	60	204,5		204,5		224,5							
80	3		210		210		210		210		230	80						
100	4	F07/□14		236,5		236,5		236,5		256,5		256,5		256,5				
125	5			249		249	60	249	60	269		269	80					
150	6			262		262		262		282	80	282						
200	8	F10/□17				324,5		324,5		324,5		324,5		334,5		334,5		
250	10	F10/□22				350	80	350	80	350	80	350		360	90	360		
300	12	F12/□22						375		385		385		385	90	385	90	
350	14	F12/□27								395	90	395	90	395		395		

DN	NPS	Iso top of the valve	Exceeding length of the shaft H3															
			Kit	□9	□11	□14	□17	□22	□27	□36	□46							
32	1 <sup>1/4</sup>	F05/□11	F03															
40	1 <sup>1/2</sup>		F04															
50	2		F05	7	9	12	15	20	25									
65	2 <sup>1/2</sup>		F07															
80	3		F10															
100	4	F07/□14	F04															
125	5		F05															
150	6		F07		9	12	15	20	25	34								
200	8	F10/□17	F10															
			F12															
			F14															
			F05															
250	10	F10/□22	F07															
			F10			12	15	20	25	34								
			F12															
			F14															
300	12	F12/□22	F07															
			F10			12	15	20	25	34	44							
			F12															
			F14															
350	14	F12/□27	F07															
			F10				15	20	25	34	48							
			F12															
			F14															

N°	N	aR	aS
F03	4	5,5	36
F04	4	5,5	42
F05	4	6,5	50
F07	4	8,5	70
F10	4	10,5	102
F12	4	12,5	125
F14	4	17	140
F16	4	22	165

Reminder of the iso top dimensions EN ISO 5211 (see also the overall dimensions).

Other special executions on request : actuated by par square drive and flat according to EN ISO 5211 , subjected to technical feasibility.



**Technical manual**      **Sylax**

**Connecting flanges**

The Sylax butterfly valve can be mounted with the following connections (other types on request) :

- ✓ : possible mounting
- : possible mounting with re-machining
- : Impossible mounting

**• 4 Centering lugs**

DN	NPS	EN 1092-1 & EN 1092-2					ASME/ANSI B16.1 Class 125	ASME/ANSI B16.5 Class 150	ASME/ANSI B16.5 Class 300	BS10		JIS B2238 & JIS B2239		
		PN6	PN10	PN16	PN25	PN40				Table D	Table E	5K	10K	16K
25	1	✓(1)	✓(1)	✓(1)	✓(1)	✓(1)	✓(1)	✓(1)	✓(1)	✓(1)	✓(1)	●	✓	●
32	1 1/4	✓	✓	✓	✓	✓	✓(2)	✓(2)	✓	●	✓	●	✓	●
40	1 1/2	✓	✓	✓	✓	✓	✓	✓	●	✓	✓	●	✓	●
50	2	✓	✓	✓	✓	✓	✓	✓	●	✓	✓	●	✓	●
65	2 1/2	✓	✓	✓	●	●	✓	✓	●	●	●	●	✓	●
80	3	✓	✓	✓	✓	✓	✓	✓	●	✓	✓	●	✓	●
100	4	✓	✓	✓	●	●	✓	✓	●	✓	✓	●	✓	●
125	5	✓	✓	✓	●	●	✓	✓	●	✓	✓	●	✓	●
150	6	✓	✓	✓	●	●	✓	✓	●	✓	✓	●	✓	●
200	8	✓	✓	✓	●	●	✓	✓	●	✓	✓	●	✓	●
250	10	✓	✓	✓	●	●	✓	✓	■	✓	✓	●	✓	●
300	12	✓	✓	✓	●	●	✓	✓	■	✓	✓	●	✓	●
350	14	✓	✓	✓	●	●	✓	✓	■	✓	✓	●	✓	●

(1) Cast iron body (G/L-250 (JL1040) only);  
 (2) Cast iron body (G/L-350 (JL1040) only); re-machining for ductile iron body GJS 400-15 (JIS1030)

**• 2 Centering lugs** <sup>(3)</sup>

DN	NPS	EN 1092-1 & EN 1092-2					ASME/ANSI B16.1 Class 125	ASME/ANSI B16.5 Class 150	ASME/ANSI B16.5 Class 300	BS10		JIS B2238 & JIS B2239		
		PN6	PN10	PN16	PN25	PN40				Table D	Table E	5K	10K	16K
32	1 1/4	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
40	1 1/2	✓	✓	✓	✓	✓	✓	✓	●	✓	✓	✓	✓	✓
50	2	●	✓	✓	✓	✓	✓	✓	●	✓	✓	●	✓	●
65	2 1/2	●	✓	✓	●	●	✓	✓	●	✓	✓	●	✓	●
80	3	●	✓	✓	✓	✓	✓	✓	●	✓	✓	●	✓	●
100	4	●	✓	✓	●	●	✓	✓	●	✓	✓	●	✓	●
125	5	●	✓	✓	●	●	✓	✓	●	✓	✓	●	✓	●
150	6	●	✓	✓	●	●	✓	✓	●	✓	✓	●	✓	●
200	8	●	✓	✓	●	●	✓	✓	●	✓	✓	●	✓	●
250	10	●	✓	✓	●	●	✓	✓	■	✓	✓	●	✓	●
300	12	●	✓	✓	●	●	✓	✓	■	✓	✓	●	✓	●
350	14	●	✓	✓	●	●	✓	✓	■	✓	✓	●	✓	●

(3) Body in stainless steel (1.4404) and in steel (WCB)

**• Tapped lugs**

DN	NPS	EN 1092-1 & EN 1092-2					ASME/ANSI B16.1 Class 125	ASME/ANSI B16.5 Class 150	ASME/ANSI B16.5 Class 300	BS10		JIS B2238 & JIS B2239		
		PN6	PN10	PN16	PN25	PN40				Table D	Table E	5K	10K	16K
32	1 1/4	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
40	1 1/2	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
50	2	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	■	✓	✓(4)
65	2 1/2	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
80	3	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
100	4	■	✓	✓	✓	✓	✓	✓	✓	✓(5)	✓	■	✓	✓
125	5	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
150	6	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
200	8	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
250	10	✓	✓	✓	✓	✓	✓	✓	■	✓	✓	✓	✓	✓
300	12	✓	✓	✓	✓	✓	✓	✓	■	✓	✓	✓	✓	✓
350	14	■	✓	✓	■	■	✓	✓	■	✓	✓	■	✓	■

(4) Possible mounting for ductile iron body GJS 400-15 (JIS1030) , impossible mounting for body in cast iron (G/L-250 (JL1040) and in stainless steel.  
 (5) Possible mounting if the butterfly valve is inclined at 20,6°



**Technical manual Sylax**

**Connecting flanges**

✓ : possible mounting  
 ● : possible mounting after re-machining  
 ■ : impossible mounting

**• Double flanges**

DN	NPS	EN 1092-1 & EN 1092-2					ASME/ANSI B16.1 Class 125	ASME/ANSI B16.5 Class 150	ASME/ANSI B16.5 Class 300	BS10		JIS B2238 & JIS B2239		
		PN6	PN10	PN16	PN25	PN40				Table D	Table E	5K	10K	16K
200	8	■	✓	✓	●	■	✓	✓	■	■	■	■	■	■
250	10	■	✓	✓	■	■	✓	✓	■	■	■	■	■	■
300	12	■	✓	✓	■	■	✓	✓	■	■	■	■	■	■
350	14	■	✓	✓	■	■	●	●	■	■	■	■	■	■

**• Central flange**


DN	NPS	EN 1092-1 & EN 1092-2					ASME/ANSI B16.1 Class 125	ASME/ANSI B16.5 Class 150	ASME/ANSI B16.5 Class 300	BS10		JIS B2238 & JIS B2239		
		PN6	PN10	PN16	PN25	PN40				Table D	Table E	5K	10K	16K
80	3	✓	✓	✓	●	●	✓	✓	■	■	■	■	■	■
100	4	■	✓	✓	●	●	✓	✓	■	■	■	■	■	■
125	5	●	✓	✓	●	●	✓	✓	■	■	■	■	■	■
150	6	●	✓	✓	■	■	✓	✓	■	■	■	■	■	■
200	8	●	✓	✓	■	■	✓	✓	■	■	■	■	■	■

**• Ring shaped type body**

DN	NPS	EN 1092-1 & EN 1092-2					ASME/ANSI B16.1 Class 125	ASME/ANSI B16.5 Class 150	ASME/ANSI B16.5 Class 300	BS10		JIS B2238 & JIS B2239		
		PN6	PN10	PN16	PN25	PN40				Table D	Table E	5K	10K	16K
50	2	●	✓	✓	✓	✓	●	●	✓	■	■	■	■	■
65	2 1/2	●	✓	✓	●	●	●	●	✓	■	■	■	■	■
80	3	●	✓	✓	✓	✓	●	●	✓	■	■	■	■	■
100	4	■	✓	✓	✓	✓	✓	✓	■	■	■	■	■	■

**• End of line mounting and downstream removing**

The end of line mounting and the downstream removing, at ambient temperature, of the Sylax butterfly valve is limited to the pressure mentioned on page 11 according to the PED directive 97/23/CE .

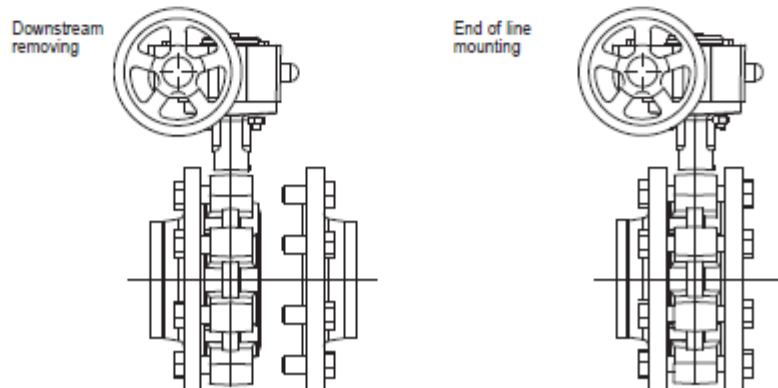





---

**Technical manual**      **Sylax**

---

**Normalisation**

- **Design :**  
According to EN 593 and marking according to EN 19
  
- **Iso top connection for actuations :**  
According to EN ISO 5211
  
- **Face to face :**  
According to    558-1 series 20  
                      ISO 5752 series 20  
                      API 609 table 2
  
- **Connecting flanges :** see on page 8  
According to    EN1092-1 and EN1092-2  
                      ASME/ANSI B16.5  
                      BS10-d and BS10-e  
                      JIS B2238 and JIS B2239
  
- **Tests :**  
According to EN12266-1  
                      Resistance and tightness of the body : test P11(1,5 x allowable operating pressure)  
                      Tightness of the seat : test P12 rate A (1,1 x allowable operating pressure)  
  
According to EN12266-2  
                      Anti-static design : test F21
  
- **European Directives :**  
Our butterfly valves are in accordance to the safety requirements of the following directives. :

**Directive 97/23/CE : Equipments under pressure PED (Pressure Equipment Directive)**

Applies to the design, manufacturing and the assessment of the conformity of pressure equipment, the maximum allowable pressure of which is 0.5 bar.

Pressure equipment for water supply, distribution, and disposal of water is excluded.  
Depending on the type of pressure equipment, maximum allowable temperature (PS), DN, physical nature of the fluid (liquid, gas or vapour) and the degree of danger of the fluid (group I/2\*), the directive classifies this same equipment into different categories (article 3.3, I, II, III, IV), required for the assessment of conformity with CE marking.

The equipment defined in article 3.3 of the directive must not bear the CE marking.

(\*) Group 1 : hazardous fluids (directive 67/548/EEC) / explosive / highly flammable / easily flammable / flammable / very toxic / toxic / combustion agents.

Group 2 : all other fluids

**Important notice :** the indicated pressure for the different categories of fluids (L1/L2/G1/G2) is under no condition a guarantee of use. Therefore, it is essential to validate the use of products under given operating conditions. Danfoss Socola is not responsible for alteration of the products to working conditions not previously specified by the customer.  
In order to facilitate your choice regarding these new regulatory requirements, Danfoss Socola has put the necessary information concerning products with CE marking, specification sheets and product identification plates at your disposal in the price list (+ see additional explanations on the detachable slip).  
In addition, the operating instructions are available on our web site [www.danfoss-socola.com](http://www.danfoss-socola.com) or by simple request from our sales department.

**Directive 94/9/CE : ATEX (EXplosive ATmospheres)**

*This directive is only applicable for the following atmospheric conditions : -20°C < T < +60°C ; 0,8 bar ≤ P ≤ 1,2 bar.*

*In this risk analysis, the fluid which passes through the valve is not taken into account. It is under the responsibility of the user to take into consideration the risks generated by the fluid like : heating of the surface of the valve, internal chocks generated by granulates, wave of chocks due to the installation (water hammering), or the risks due to foreign bodies which are inside the installation.*

**Classification of the bare shaft valve :**

The marking of the bare shaft valve is :  $\text{Ex} \text{II} 2 \text{ DG}$ .

**Classification of the set valve + actuation :**

- **Valve with a hand lever :**

*The use of hand levers produced by Danfoss Socola within an ATEX area do not represent additional risks. The valve with a hand lever is in conformity to the marking :  $\text{Ex} \text{II} 2 \text{ DG}$ .*

- **Valve with other actuations :**

*The classification of the valve + actuation supplied by Danfoss Socola is similar to the lowest classification of the components which composed the assembly.*

**No additional marking will be used to indicate the classification of the assembly.**

**If only one component of the assembly set is not market with ATEX label, therefore the complete assembly set is not conformed to ATEX directive.**

**The classification of the equipment allows its use in a determinate area; an use in another area is under the responsibility of the user.**

An instruction notice specifying the installation characteristics and the commission of the Sylax is added to every product when the ATEX version is specified; It is available on our web site [www.danfoss-socola.com](http://www.danfoss-socola.com) or on request by our sales department.



**Technical manual Sylax**

**Pressure/Temperature**

**DIRECTIVE 97/23/CE Equipments under pressure.**

Products manufactured in conformity with the requirements of the directive, according to pressure, DN and fluid (see on the precedent page).

Liner	DN in mm	Mounting	PFA (bar)	PS (bar)				Cat.
			WATER	L1	L2	G1	G2	
25 bar EPDM , Nitrile (alu bronze disc)	32 to 150	Flanges	25	x	25	x	x	I
		End of line	16	x	16	x	x	I
20 bar EPDM , Nitrile (alu bronze disc)	32 to 350	Flanges	20	x	20	x	x	I
		End of line	16	x	12	x	x	I
16 bar EPDM , Nitrile (alu bronze disc)	32 to 125	Flanges	16	16	16	x	10	I
		End of line	12	12	12	x	10	I
	150	Flanges	16	10	16	x	10	I
		End of line	12	6	12	x	10	I
	200 to 300	Flanges	16	10	16	x	10	I
		End of line	10	6	10	x	10	I
350	Flanges	16	10	16	x	10	I	
End of line	8	6	8	x	8	I		
10 bar EPDM , Nitrile (alu bronze disc), White nitrile Carboxylated nitrile, White EPDM	25 to 350	Flanges	10	10	10	x	10	I
		End of line	6	6	6	x	6	I
8 bar EPDM , Nitrile (alu bronze disc), White EPDM	32 to 350	Flanges	6	6	6	x	6	I
		End of line	4	4	4	x	4	I
25 bar Nitrile (except alu bronze disc)	32 to 150	Flanges	25	25	25	x	x	II
		End of line	16	16	16	x	x	II
20 bar Nitrile (except alu bronze disc, Neoprene, Butyl, Natural rubber, White natural rubber)	32 to 350	Flanges	20	20	20	x	x	II
		End of line	16	16	16	x	x	II
16 bar Nitrile (except alu bronze disc), Neoprene, Butyl, Natural rubber, White natural rubber, Hypalon,	32 to 150	Flanges	16	16	16	10	16	II
		End of line	12	12	12	x	12	II
	200 to 300	Flanges	16	16	16	10	10	II
		End of line	10	10	10	x	10	II
350	Flanges	16	16	16	10	10	II	
End of line	8	8	8	x	8	II		
10 bar Nitrile (except .CC333G disc), FKM	25 to 350	Flanges	10	10	10	10	10	II
		End of line	6	6	6	x	6	II
10 bar Silicone	32 to 150	Flanges	10	10	10	10	10	II
		End of line	6	6	6	x	6	II
	200 to 350	Flanges	6	6	6	6	6	II
		End of line	4	4	4	x	4	II
8 bar Nitrile (except alu bronze disc), Neoprene, Butyl, Natural rubber, White natural rubber, Hypalon	32 to 350	Flanges	6	6	6	6	6	II
		End of line	4	4	4	x	4	II

PS : Maximum allowable pressure (in bar) according to Directive 97/23/CE

PFA : Allowable operating pressure (in bar) for supply, distribution and disposal of water.

**Torque values**

Torques for water - in Nm EPDM / NBR	25	32	40	50	65	80	100	125	150	200	250	300	350
PS6	10	15	15	18	23	30	50	70	90	150	255	380	560
PS16	10	15	15	24	35	40	66	86	110	220	340	500	720
PS20		20	20	32	45	65	100	130	190	350	560	850	1250
PS25		25	25	50	70	120	240	270	460				

**NOTE :**

Torques for liner in EPDM and high content nitrile (except DN250 to 350 for PS20).  
One actuation minimum per month.



Technical manual **Sylax**

Flow rate (Kv)


OPENING STAGE - Stainless steel disc

DN	10°	20°	30°	40°	50°	60°	70°	80°	90°
25	-	-	-	3	8	16	27	35	40
32/40	-	-	-	5	12	25	40	56	62
50	-	-	1	8	18	33	54	71	79
65	-	-	8	19	41	78	118	158	174
80	-	3	18	43	79	138	211	252	275
100	-	15	38	83	154	253	388	458	496
125	-	20	61	134	249	399	599	792	883
150	5	37	100	200	374	600	883	1109	1212
200	15	78	200	399	680	1099	1686	2196	2500
250	40	150	333	621	1084	1785	2852	3517	3948
300	60	219	500	989	1738	2770	4097	5118	5635
350	145	420	882	1676	2850	4482	6000	7431	8520

The butterfly valve is not the best product for regulating. Nevertheless, the Sylax butterfly valve can be used to regulate by an opening stage between 30° and 90°.

A regulation in the opening stage lower than 30° is not advisable because of over speed, cavitation effect, which could damage prematurely the valve.

*Kv = volume of water in m<sup>3</sup>/h through a valve at a preset opening stage and under a head loss of 1 bar.*

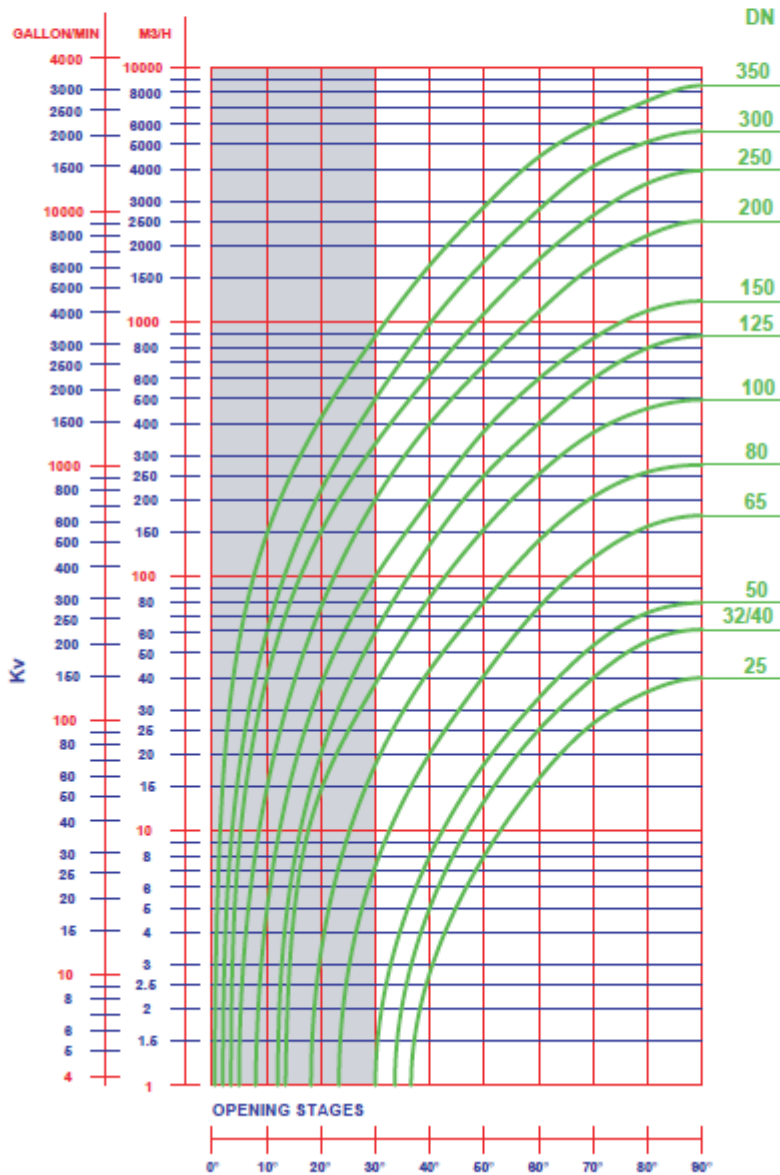



Technical manual **Sylax**

Head loss diagram ( $\Delta P$ )

