



## SPECIFICATIONS

1	Max Torque:	130 Nm
2	Weight:	57 KG
3	Manual Override weight:	74 KG
4	Mounting Flange:	ISO 5211 F10
5	Housing:	IP67 Nema 4X
6	Approval:	CSA and RoHS, CE marked
7	Duty Cycle:	50% to IEC standard



## STANDARD CAPABILITY:

- Duty cycle rating: 50% (Conform to IEC standard).
- Two-position control.

## AMBIENT TEMPERATURE RANGE:


- Temperature: -30°C~+65°C/-22°F~+149°F
- Humidity: 30%~95%

## ENCLOSURE:

- IP67、NEMA 4X: Water-proof and dust-proof enclosure.
- Material: Dry powder coating aluminum alloy.

## LUBRICATION:

- Gear trains have been already lubricated sufficiently with anti-high temperature lubricant at the factory.

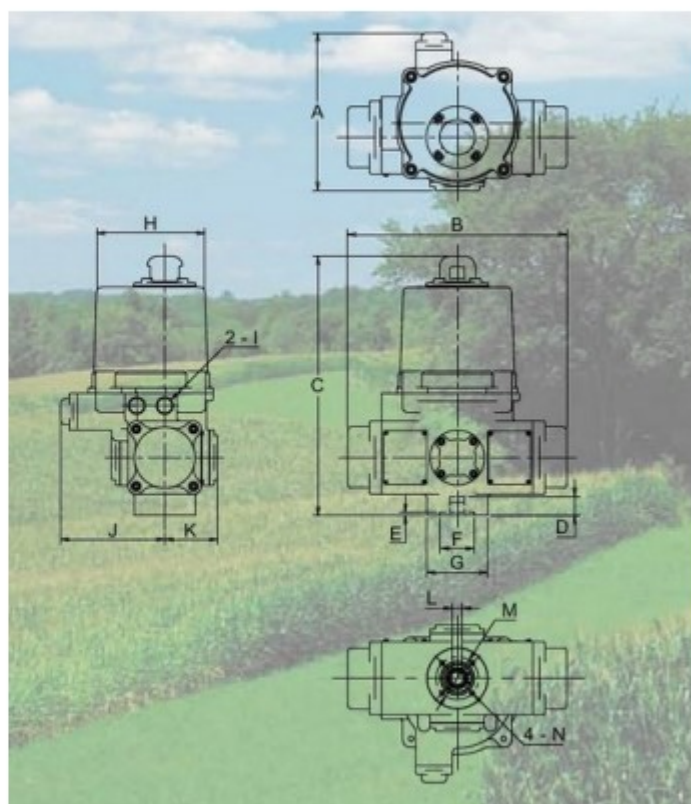

DIMENSIONS																
Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	Flange Type	
S1300	484	462	638	41	5	Ø70	Ø125	Ø265	1/2"NPT	247	237	22	Ø102	M10*1.5	68	Ø295 F10

