



# ALLVALVES SERIES S2000 - SPRING RETURN ELECTRIC

[www.allvalves.co.uk](http://www.allvalves.co.uk)

TYPE SUN YEH: S SERIES

## SPECIFICATIONS

1	Max Torque:	200 Nm
2	Weight:	95 KG
3	Manual Override weight:	135 KG
4	Mounting Flange:	ISO 5211 F12
5	Housing:	IP67 Nema 4X
6	Approval:	CSA and RoHS, CE marked
7	Duty Cycle:	50% to IEC standard



## STANDARD CAPABILITY:

- Duty cycle rating: 50% (Conform to IEC standard).
- Two-position control.

## AMBIENT TEMPERATURE RANGE:


- Temperature: -30°C~+65°C/-22°F~+149°F
- Humidity: 30%~95%

## ENCLOSURE:

- IP67 \ NEMA 4X: Water-proof and dust-proof enclosure.
- Material: Dry powder coating aluminum alloy.

## LUBRICATION:

- Gear trains have been already lubricated sufficiently with anti-high temperature lubricant at the factory.

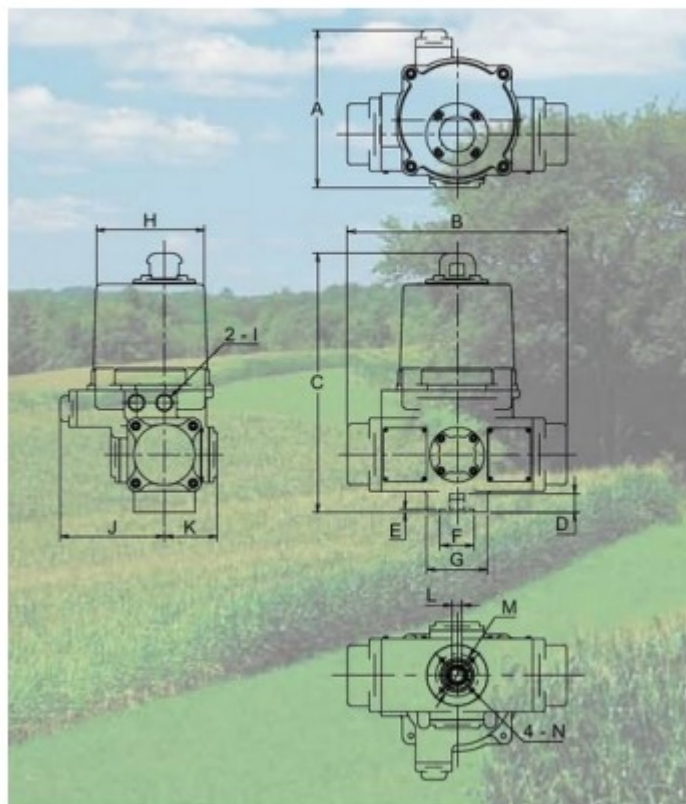

DIMENSIONS																
Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	Flange Type	
S2600	589	600	732	45	5	Ø85	Ø150	Ø305	1/2"NPT	305	284	27	Ø125	M12*1.75	109	Ø398 F12



Tel: 01386 552369

Fax: 01386 554227

[sales@allvalves.co.uk](mailto:sales@allvalves.co.uk)

Allvalves Online Ltd, Automation House, Unit 2, Pershore, WR10 2DF UK