



ALLVALVES SERIES S2600 - SPRING RETURN ELECTRIC

www.allvalves.co.uk

TYPE SUN YEH: S SERIES

SPECIFICATIONS

1	Power consumption:	9A Run
2	Max Torque:	260Nm
3	Speed:	17 secs motor and 3 secs spring
4	Weight:	95KG
5	Manual Override:	Hand wheel
6	Mounting Flange:	F12 x 27mm
7	Housing:	IP67 Nema 4X
8	Approval:	CSA and RoHS, CE marked
9	Duty Cycle:	50% to IEC standard

STANDARD CAPABILITY:

- Duty cycle rating: 50% (Conform to IEC standard).
- Two-position control.

AMBIENT TEMPERATURE RANGE:

- Temperature: -30°C~+65°C/-22°F~+149°F
- Humidity: 30%~95%


ENCLOSURE:

- IP67、NEMA 4X: Water-proof and dust-proof enclosure.
- Material: Dry powder coating aluminum alloy.



LUBRICATION:

- Gear trains have been already lubricated sufficiently with anti-high temperature lubricant at the factory.

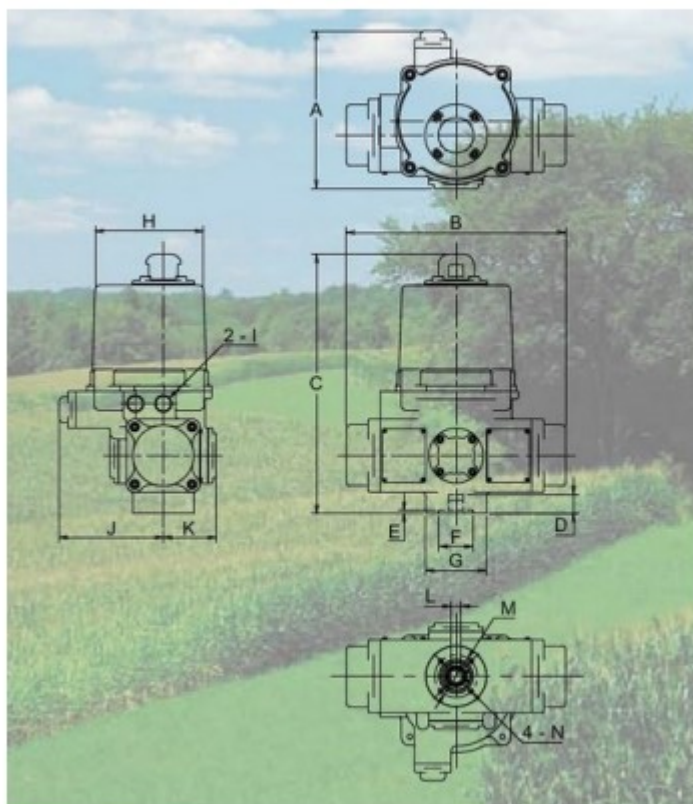

DIMENSIONS

Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	Flange Type
S2600	438	600	577	46	6	Ø85	Ø170	Ø305	1/2"NPT	305	133	27	Ø125	M12*1.75	F12



Tel: 01386 552369

Fax: 01386 554227

sales@allvalves.co.uk

Allvalves Online Ltd, Automation House, Unit 2, Pershore, WR10 2DF UK