

Main Features :-



- 1pc Reduced Bore
- BSP Female ends
- 25C to + 180C Temperature Range
- PN63 rated
- PTFE seats
- Lever Operated
- Ends to ISO-7



GENEBRE
be water, be Genebre

TYPE: INDUSTRIAL VALVES

Dimensional Drawing:-

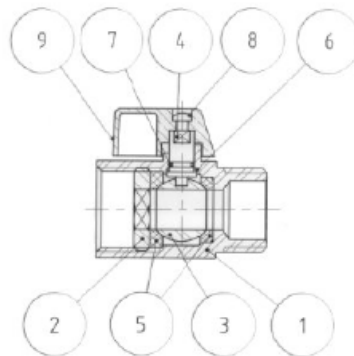

| Nº | Denominación/Name | Material | Acabado Superficial/Surface Treatment |
|----|---------------------------------|------------------------------|---------------------------------------|
| 1 | Cuerpo / Body | Acero Inox AISI 316 / SS 316 | Pulido exterior / External polished. |
| 2 | Tapa / Cap | Acero Inox AISI 316 / SS 316 | Pulido exterior / External polished. |
| 3 | Bola / Ball | Acero Inox AISI 316 / SS 316 | ----- |
| 4 | Eje / Stem | Acero Inox AISI 304 / SS 304 | ----- |
| 5 | Asiento / Seat ball | Teflón (PTFE) | ----- |
| 6 | Anillo Fricción / Friction ring | Teflón (PTFE) | ----- |
| 7 | Tórica / O - Ring | NBR | ----- |
| 8 | Tomillo / Screw | Acero Inox AISI 304 / SS 304 | ----- |
| 9 | Maneta / Handle | Aluminio / Aluminium | Pintado / Painted |

DIMENSIONES GENERALES / GENERAL DIMENSIONS

| Ref | Medida / Size | PN | Dimensiones / Dimensions (mm) | | | | Peso / Weight (g) |
|---------|---------------|----|-------------------------------|----|----|----|-------------------|
| | | | P | A | L | M | |
| 2005 02 | 1/4" | 63 | 8 | 26 | 40 | 22 | 83 |
| 2005 03 | 3/8" | 63 | 8 | 26 | 40 | 22 | 82 |
| 2005 04 | 1/2" | 63 | 9 | 28 | 46 | 22 | 116 |
| 2005 05 | 3/4" | 63 | 12,5 | 34 | 54 | 22 | 193 |
| 2005 06 | 1" | 63 | 15 | 34 | 65 | 22 | 280 |

ISO 9001:2015 Accredited Company

Tel: +44(0)1386 552369

Fax: +44(0)1386 554227

sales@allvalves.co.uk

www.allvalves.co.uk

Allvalves Online Ltd, Automation House, Unit 2, Pershore, WR10 2DF UK