




BRASS VALVES

GENEBRE PART: 3302 BRASS Y TYPE STRAINER, BSP




SPECIFICATIONS

1	Material Forged brass
2	Ends screwed BSP in accordance with ISO 228/1
3	Max working pressure 16 Bar
4	Working temperature +120°C
5	Filter screen in AISI 3044

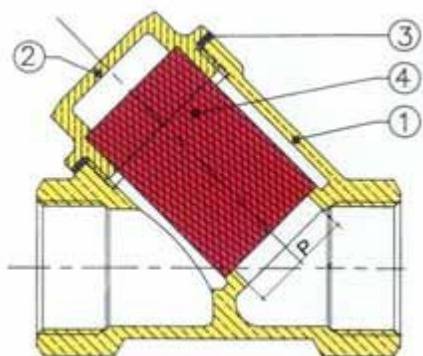

MATERIALS

1	Forged brass
2	Forged brass
3	NBR
4	AISI 3044

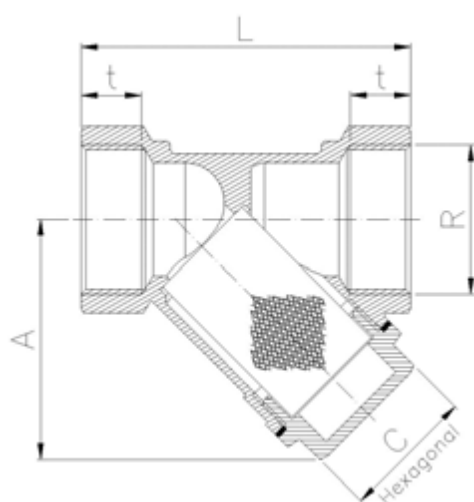

DIMENSIONS

AVOL REF	SIZE	Mesh μ	A mm	L mm	Wt Kg
3302 04	1/2"	500	38	56.5	0.12
3302 05	3/4"	500	44	66.0	0.20
3302 06	1"	500	50	74.0	0.27
3302 07	1 1/4"	500	66	96.0	0.54
3302 08	1 1/2"	500	71	104.0	0.61
3302 09	2"	500	89	125.0	1.15
3302 10	2 1/2"	1200	110	154.0	2.10
3302 11	3"	1200	120	173.0	2.90
3302 12	4"	1200	152	210.0	5.50



STAINLESS STEEL VALVES

GENEBRE PART: 3302 BRASS Y TYPE STRAINER, BSP


FILTER SCREEN DETAILS



Standard screen used for sizes 1/2" to 1", & 2 1/2" to 4"



Reinforced screen used for sizes 1 1/4" to 2"

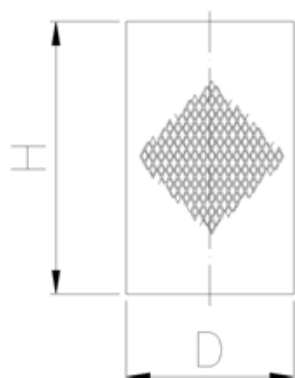

SCREEN DIMENSIONS					
AVOL REF	SIZE	Mesh μ	H mm	D mm	Wt g
3302 04	1/2"	500	30.5	18.5	1
3302 05	3/4"	500	39.5	23.0	2
3302 06	1"	500	40.0	25.5	3
3302 07	1 1/4"	500	46.5	34.0	7
3302 08	1 1/2"	500	48.5	41.5	8
3302 09	2"	500	70.5	50.0	13
3302 10	2 1/2"	1200	80.5	62.0	22
3302 11	3"	1200	100.0	76.0	36
3302 12	4"	1200	123.5	95.0	53