



FIRE SAFE
API 607 4th Edition
Certified



We Make Automation Easy

SERIES 88

**DIRECT MOUNT
HIGH PERFORMANCE
3-PIECE HEAVY DUTY BALL VALVES**

**DIRECT MOUNTING OF
ACTUATOR TO VALVES**



DESIGN ADVANTAGES


- **PATENTED ISO 5211 DIRECT MOUNT PAD**
Allows direct mounting of pneumatic and electric actuators, no brackets and couplings needed, easy and low cost for automated service.
- **EXTRA HIGH CYCLE LIFE**
Mars maintenance free live loaded double sealing high cycle stem packing system provides extra longer service life.
- **BLOW OUT PROOF STEM**
- **3-PIECE SWING OUT DESIGN**
- **ANTI-STATIC DEVICE**
Standard applied between stem and body, stem and ball
- **ALL STAINLESS STEEL WELD ENDS IN 316L**
Reduces inter-granular corrosion in welding
- **FULLY ENCAPSULATED BODY SEALS**
Allows welding in line without disassembly
- **WIDE RANGE OF SEAT AND SEAL MATERIALS AVAILABLE**

SPECIFICATIONS

Construction : 3-piece Body, Full Bore or Reduced Bore
 Size : Full Bore 1/4" to 4"
 Reduced Bore 1/2" to 4"
 Ends : Screwed, Socket Weld, Butt Weld
 Body : CF8M, WCB / DIN 1.4408, 1.0619
 Ball & Stem : 316 S.S.
 Seats : Reinforced Teflon
 Rating : 1/4" ~ 1" 2000 P.S.I.
 1 1/4" ~ 2" 1500 P.S.I.
 2 1/2" ~ 4" 1000 P.S.I.
 Temperature : -60° F ~ 420° F (R-PTFE)

STANDARDS


ANSI/ASME : B16.34, B16.25, B1.20.1
 API : 6D, 607, 598
 ISO : 5211, 5209, 5752, 7/1, 281
 DIN : 3357, 50.049-3.1B
 MSS : SP25, SP72
 BS : 5351, 6755-1, 6755-2

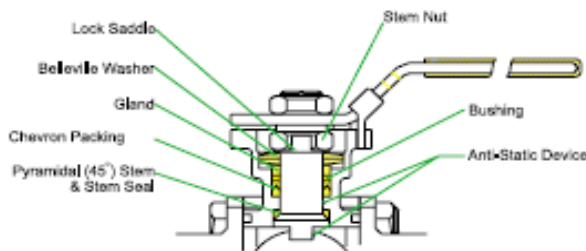

Germany Patent No. 299 02 532.2
 United States Patent No. 5,954,088
 China Patent No. ZL 99 2 09161.3

MAINTENANCE FREE LIVE LOADED DOUBLE SEALING HIGH CYCLE STEM SYSTEM

Our high cycle stem design is accomplished by double sealing system. The 45° Pyramidal Segment Ring in conjunction with a seal that fits on top of the Pyramidal segment provides the primary seal. Most of the media in the pipeline is contained by this seal. As a precautionary measure the V-Ring Chevron packing provides the secondary sealing. On top of the stem is a set of Belleville Washers that automatically adjusts compression of the seal to compensate for wear, pressure, or temperature fluctuations.

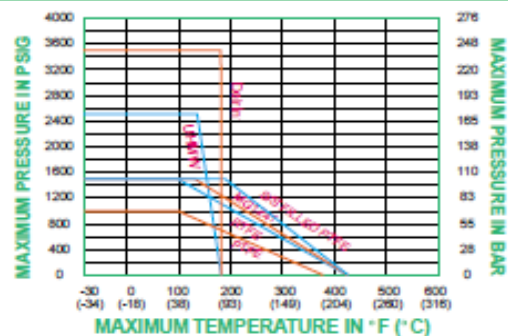

SEAT RATING CHART

These ratings are based on the seats only, please also refer to the valve body rating to be sure all the valve limitations meet your application.

BREAK AWAY TORQUE & Cv VALUES


SIZE	BREAK AWAY TORQUE(Nm)		Cv U.S.GPM	
	F.Bore	R.Bore	F.Bore	R.Bore
1/4"	3	-	8	-
3/8"	3	-	8	-
1/2"	3	3	12	8
3/4"	7	3	32	12
1"	12	7	56	32
1 1/4"	15	12	82	56
1 1/2"	20	15	120	82
2"	23	20	240	120
2 1/2"	60	23	320	240
3"	80	60	585	320
4"	140	80	1020	585



ALLVALVES SERIES MARS – 88 SERIES BALL VALVE

www.allvalves.co.uk


TYPE MARS: M88

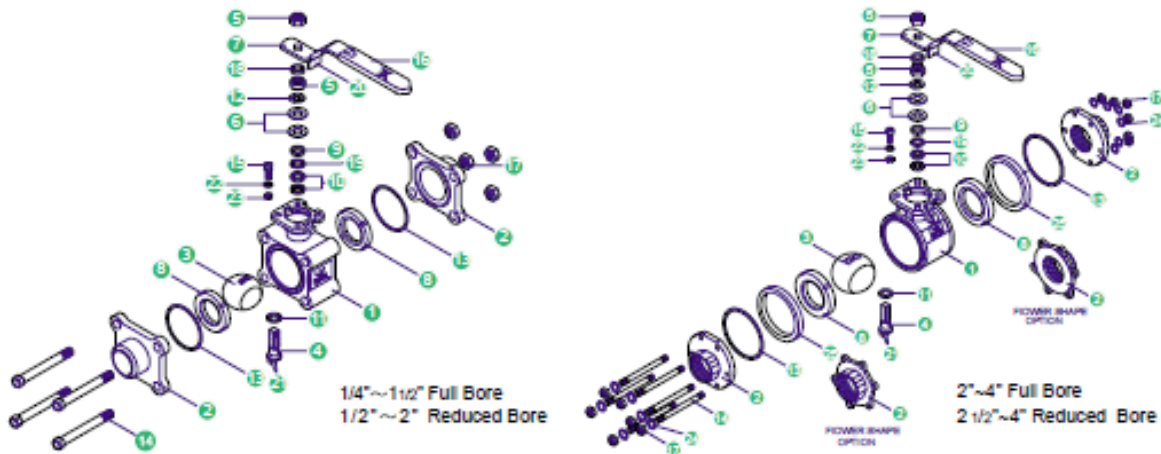

No.	Part	Material	Qty	No.	Part	Material	Qty
1	Body	ASTM A351 Gr. CF8M/ASTM A216 Gr. WCB	1	13	Body Gasket	PTFE	2
2	End Cap	ASTM A351 Gr. CF8M/ASTM A216 Gr. WCB	# 2	14	Bolt	SUS 304	*
3	Ball	SUS 316	1	15	Stop Bolt	SUS 304	1
4	Stem	SUS 316	1	16	Handle Sleeve	Vinyl	1
5	Stem Nut	SUS 304	2	17	Bolt Nut	SUS 304	&
6	Belleville Washer	SUS 301	2	18	Stem Washer	SUS 304	1
7	Handle	SUS 304	1	19	Bushing	25% Glass Fiber Filled + PTFE	1
8	Ball Seat	Reinforced PTFE	2	20	Locking Device	SUS 304	1
9	Gland	SUS 304	1	21	Anti-Static Device	SUS 304	2
10	V-Ring Packing	MG1241	@	22	Stop Nut Washer	SUS 304	1
11	Stem Seal	Reinforced PTFE	1	23	Stop Nut	SUS 304	1
12	Lock Saddle	SUS304	1	24	Bolt WASHER	SUS304	12
				25	Seat Gasket	RPTFE	2

All stainless Steel Weld Ends in 316L * Full Bore 1/4"~1 1/2" : 4 pcs 2"~4" : 6pcs Reduced Bore 1/2"~2":4pcs 2 1/2"~4":6pcs
 & For 1/4"~1 1/2"-4PCS, 2"~4"-12PCS(Full port) , 1/2"~2"-4PCS, 2 1/2"~4"-12PCS(Reduced port) @ For 1/4"~2"-2 pcs, 2 1/2"~4"-3pcs

Fire Safe Version Please Consult Factory.

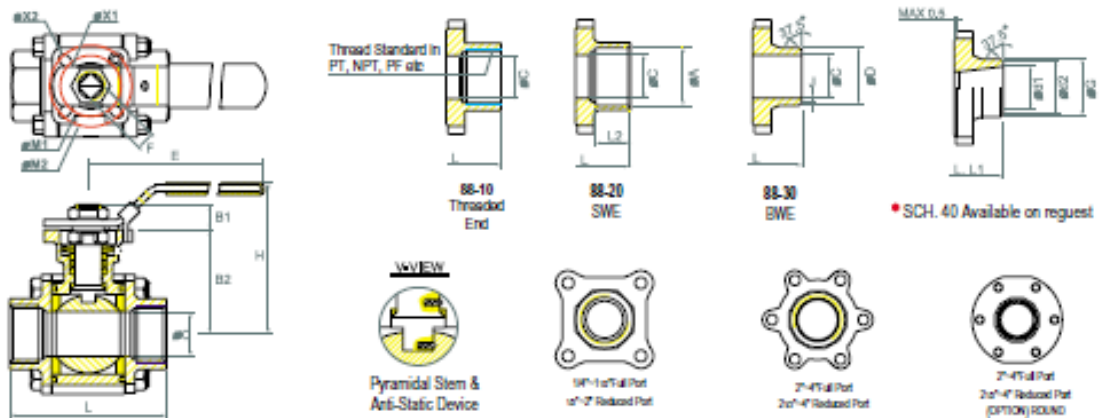

DIMENSIONS (mm)

SIZE	A		B1		B2		C		D		d1		d2		E		F		G		H		J		L		L1		L2		M1		M2		X1		X2		P		ISO5211		Wt.(kg)								
	F	R	F	R	F	R	F	R	F	R	F	R	F	R	F	R	F	R	F	R	F	R	F	R	F	R	F	R	F	R	F	R	F	R	F	R	F	R	F	R	F	R									
1/4"	14.0	8.1	42.6	11.5	14.0	14.0	3.24	11.8	139	9.0	14.0	78.3	1.75	72.5	10	36	42	6	6	3	F05 & F04	0.89																													
3/8"	17.6	8.1	42.6	12.6	17.5	12.53	13.6	139	9.0	17.5	78.3	1.75	72.5	10	36	42	6	6	3	F05 & F04	0.88																														
1/2"	21.7	21.7	8.1	8.1	42.6	42.6	15.0	12.6	21.6	21.7	15.70	18.0	139	139	9.0	9.0	21.7	21.7	78.3	78.3	1.8	1.75	72.5	72.5	10	10	36	36	42	42	6	6	6	6	3	3	F05 & F04	F05 & F04	0.82	0.88											
3/4"	27.3	27.3	9.6	8.1	45.9	42.6	20.0	15.0	27.2	27.2	20.90	24.0	139	139	9.0	9.0	27.2	27.2	82.6	78.3	1.8	1.8	85.4	72.5	75	13	13	36	36	42	42	6	6	6	6	3	3	F05 & F04	F05 & F04	1.29	0.82										
1"	34.1	34.1	11.4	9.6	53.3	48.9	25.0	20.0	34	34	25.64	28.04	30.5	30.5	166	139	11.0	9.0	34.0	34.0	95.5	82.6	1.8	1.8	105.3	85.4	88.8	13	13	42	36	50	42	6	6	7	6	5	3	F04 & F05	F05 & F04	2.01	1.29								
1 1/4"	42.6	42.6	11.4	11.4	62.6	58.3	32.0	25.0	42.6	42.7	35.08	35.08	39.0	39.0	166	166	11.0	11.0	42.7	42.7	101.8	95.5	1.8	1.8	111	105.3	105.4	13	13	42	42	50	50	6	6	7	7	5	5	F04 & F05	F04 & F05	3.16	3.01								
1 1/2"	48.7	48.7	11.4	11.4	79.0	62.6	38.0	32.0	48.6	48.6	40.49	40.49	45.0	45.0	215	166	14.0	11.0	48.6	48.6	127	101.8	1.8	1.8	127.3	111	114.4	13	13	50	42	70	50	7.5	6	9	7	10	5	F05 & F07	F04 & F05	4.21	3.16								
2"	61.0	61	14.1	14.1	87.7	79.0	50.0	38.0	60.5	60.5	52.51	52.51	56.5	56.5	215	215	14.0	14.0	60.5	60.5	135.6	127	1.8	1.8	142.4	127.3	130	16	16	50	70	70	7.5	7.5	9	9	10	10	F05 & F07	F05 & F07	5.33	4.21									
2 1/2"	77	77	16.8	14.1	108.7	87.7	65.0	50.0	76.3	76.1	66.7	70.7	262	215	262	215	14.0	14.0	76.3	76.1	167.7	135.6	1.8	1.8	185	145	145	16	16	70	102	102	10	10	12	12	16	16	F07 & F10	F05 & F07	12	6.88									
3"	90	90	17.6	16.8	117.7	108.7	80.0	65.0	90	90			262	262	262	262	14.0	14.0	90.0	90.0	170.7	167.7	1.8	1.8	205	185	185	16	16	70	102	102	10	10	12	12	16	16	F07 & F10	F07 & F10	18.2	12									
4"	115.2	115.2	16.8	17.6	137.7	117.7	100.0	80.0	116	116			312	262	312	262	14.0	14.0	116.0	116.0	192.7	176.3	1.8	1.8	240	205	240	20	20	70	102	102	10	10	12	12	16	16	F07 & F10	F07 & F10	25.8	16.2									

Tel: 01386 552369

Fax: 01386 554227

sales@allvalves.co.uk

Allvalves Online Ltd, Automation House, Unit 2, Pershore, WR10 2DF UK